



Electric Chain Hoists


Compact, Heavy Duty, Competitively Priced

- Japanese Technology
- Load limited
- Thermal overload prevention
- Emergency Stop button

Electric Chain Hoists 3-phase

- Load Limited
- Thermal overload prevention
- Lightweight, compact design with high efficiency motor
- Pressed steel structure, high strength body
- High tensile alloy steel top & bottom hooks
- Grade 80 - 7.1mm Alloy Steel load chain
- Limit switches fitted at top and bottom ends to prevent chain runout
- 415V, 50Hz Dual speed Motor 1.8Kw (3 Phase)
- Complies with ASNZS1418.2 standard

* Hoists can be re-chained to your required length (limits apply)

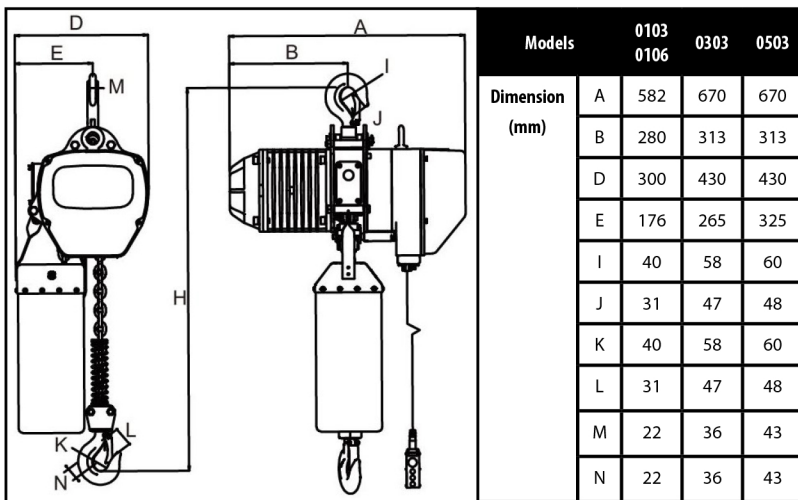

Electric Chain Hoist video



3-phase, 415v, 50Hz (dual speed)									
Model	Capacity ton	Standard Lift M	Running Test Load kN	Motor Power (kW)	No. of Chain	Dia of Chain mm	Lifting Speed (m/min)	Net Weight kg	Extra weight per metre of extra lift kg
TECH-3PH-2SP-0103	1	3	12.5	1.2	1	7.1	1.2/3.5	61	2.2
TECH-3PH-2SP-0106	1	6	12.5	1.2	1	7.1	1.2/3.5	68	2.2
TECH-3PH-2SP-0303	3	3	35.7	3.0	1	11.2	5.4/1.8	122	2.8
TECH-3PH-2SP-0503	5	3	62.5	3.0	2	11.2	2.7/0.9	151	2.6