


INSTRUCTION MANUAL

EB-320DS

Swivel Head Metal Cutting Band Saw (415V)
310 x 205mm (W x H) Rectangle

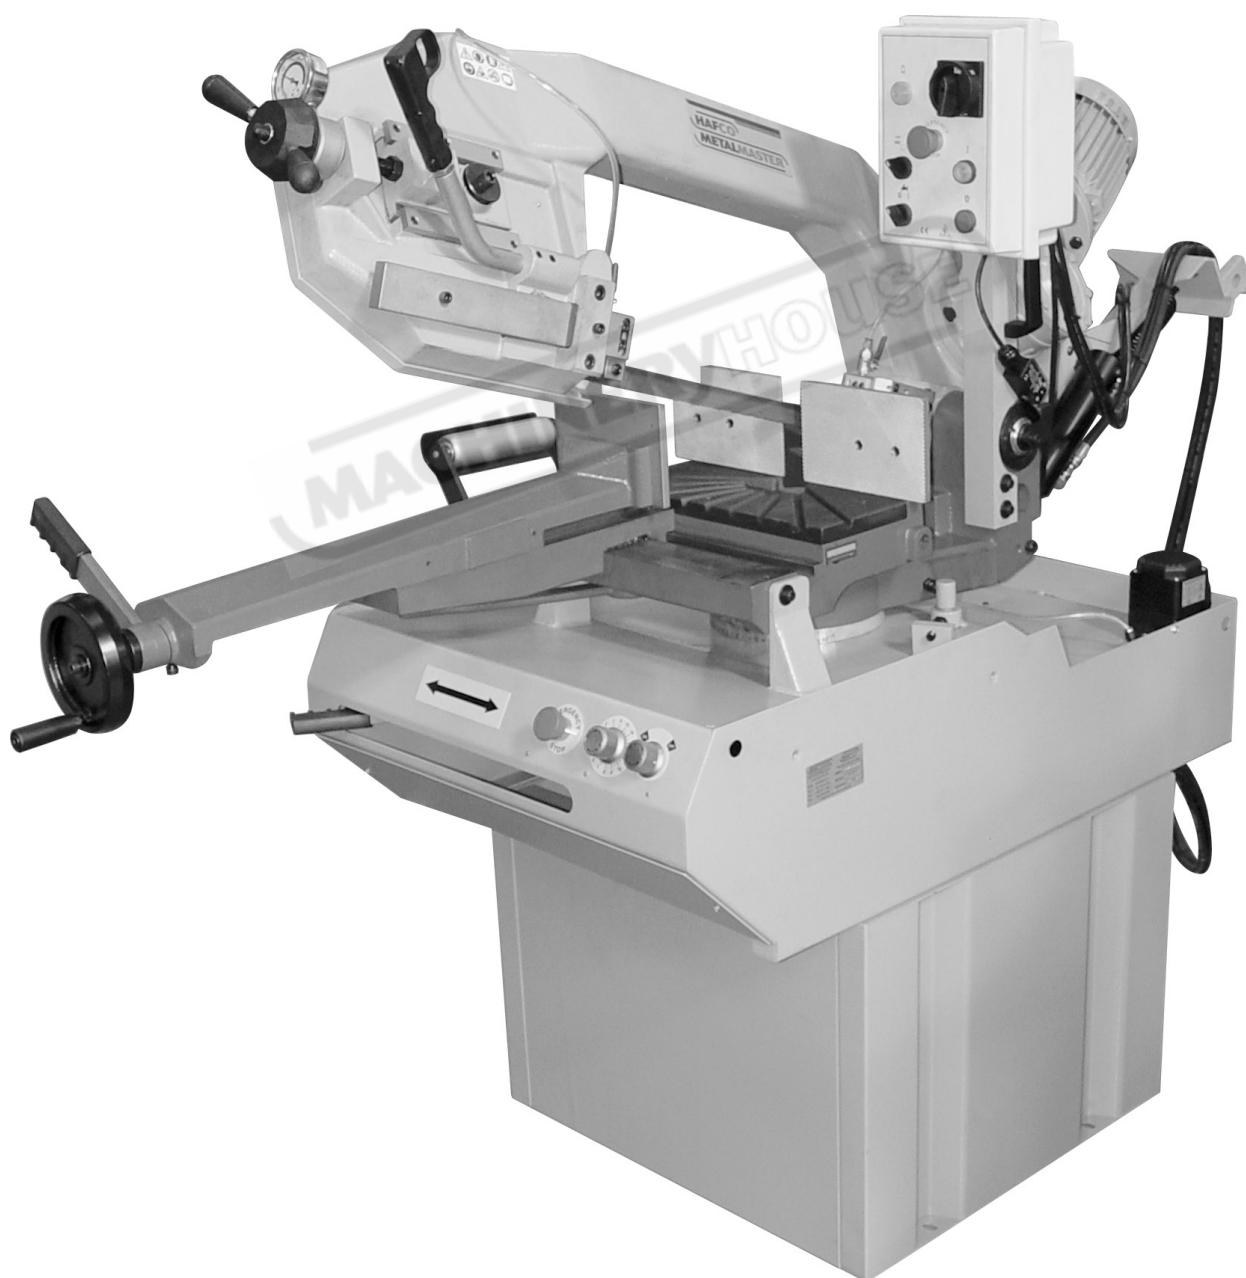

B067

1 REFERENCE TO ACCIDENT - PREVENTION REGULATIONS

This machine has been built to comply with the national and community accident-prevention regulations in force. Improper use and/or tampering with the safety devices will relieve the manufacturer of all responsibility.


1.1 - Advice for the operator



- Check that the voltage indicated on the plate, normally fixed to the machine motor, is the same as the line voltage.
- Check the efficiency of your electric supply and earthing system; connect the power cable of the machine to the socket and the earth lead (yellow-green in colour) to the earthing system.
- When the saw frame is in suspend mode (up) the toothed blade must not move.
- Only the blade section used for cutting must be kept unprotected. Remove guarding by operating on the adjustable head.
- It is forbidden to work on the machine without its shields (these are all blue or grey in colour).
- Always disconnect the machine from the power socket before blade change or carrying out any maintenance job, even in the case of abnormal machine operation.
- It is forbidden to disconnect the "man present" device, known more correctly in the EEC as the "safety switch with hold-down action".
- Always wear suitable eye protection.
- Never put your hands or arms into the cutting area while the machine is operating.
- Do not shift the machine while it is cutting.
- Do not wear loose clothing with sleeves that are too long, gloves that are too big, bracelets, chains or any other object that could get caught in the machine during operation; tie back long hair.
- Keep the area free of equipment, tools or any other object.
- Perform only one operation at a time and never have several objects in your hands at the same time. Keep your hands as clean as possible.
- All internal and/or internal operations, maintenance or repairs, must be performed in a well-lit area or where there is sufficient light from extra sources so as to avoid the risk of even slight accidents.

1.2 - Location of shields against accidental contact with the tool

- Blue, grey metal guards, fastened with screws onto the stationary blade-guide and relevant holding arm.
- Blue or grey metal guard fastened with screws onto the mobile blade-guide, ensures covering of blade section not used in cutting operation.
- Grey metal guards fastened with knobs onto the saw frame, to protect from flywheels.

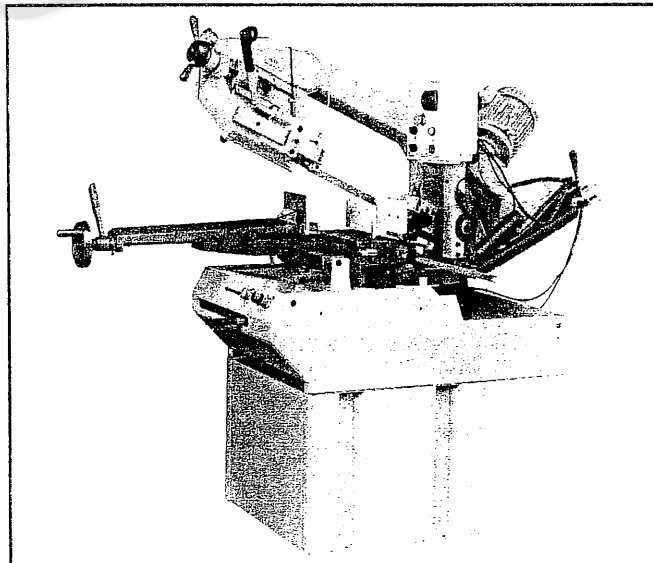

1-3 - Electrical equipment according to Euro-pean Standard "CENELEC EN 60 204-1" which assimilates, with some integrating modifications, the publication "IEC 204-1"

- The electrical equipment ensures protection against electric shock as a result of direct or indirect contact. The active parts of this equipment are housed in a box to which access is limited by screws that can only be removed with a special tool; the parts are fed with alternating current at low voltage (24 V). The equipment is protected against splashes of water and dust.
- Protection of the system against short circuits is ensured by means of rapid fuses and earthing; in the event of motor overload, protection is provided by a thermal probe.
- In the event of a power cut, the specific start-up button must be reset.
- The machine has been tested in conformity with point 20 of EN 60204.

1.4 - Emergencies according to European Standard "CENELEC EN 60 204-1"


- In the event of incorrect operation or of danger conditions, the machine may be stopped immediately by pressing the red mushroom button.
- The casual or voluntary removal of the protection shield of the flywheels causes the stepping-in of a microswitch that automatically stops all machine functions.
- In case blade breaks, the tightening pressure switch stops all machine functions.

NOTE: Resetting of machine operation after each emergency stop is achieved by reactivating the specific restart button.


2 RECOMMENDATIONS AND ADVICE FOR USE

2.1 - Recommendations and advice for using the machine

- The machine has been designed to cut metal building materials, with different shapes and profiles, used in workshops, turner's shops and general mechanical structural work.
- Only one operator is needed to use the machine, that must stand as shown in the picture.

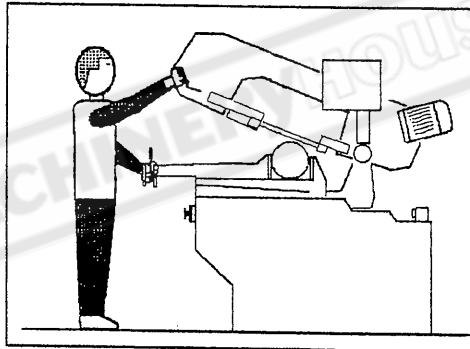

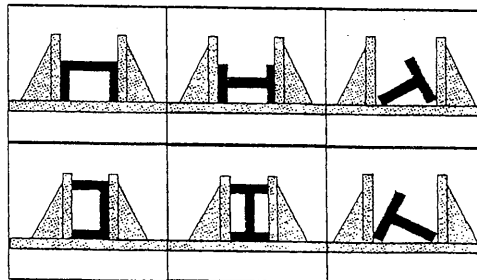


- Before starting each cutting operation, ensure that the part is firmly gripped in the vice and that the end is suitably supported. These figures show examples of suitable clamping of different section bars, bearing in mind the cutting capacities of the machine in order to achieve a good efficiency and blade durability.



- Do not use blades of a different size from those stated in the machine specifications.
- If the blade gets stuck in the cut, release the running button immediately, switch off the machine, open the vice slowly, remove the part and check that the blade or its teeth are not broken. If they are broken, change the tool.
- Check saw frame return spring to ensure proper balancing.
- Before carrying out any repairs on the machine, consult the dealer

3 TECHNICAL CHARACTERISTICS



3.1 - Table of cutting capacity and technical details

			
90°	255	205	310 x 205
45° DX	220	200	205 x 200
45° SX	230	210	230 x 210
60° DX	125	125	125 x 125

4 MACHINE DIMENSIONS 4 TRANSPORT INSTALLATION DISMANTLING


4.1 - Machine dimensions

TECHNICAL DATA			
BLADE MOTOR	Kw		1.5
COOLANT LIQUID MOTOR	Kw		0.11
BLADE DIMENSIONS	mm	2750 × 27 × 0.9	
FLYWHEEL φ	mm		330
CUTTING SPEED	m/1'		35-70
VICE OPENING	mm		310
WORKING TABLE HEIGHT	mm		950
MACHINE WEIGHT	kg		360

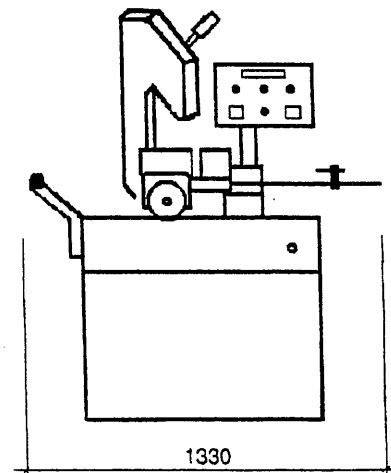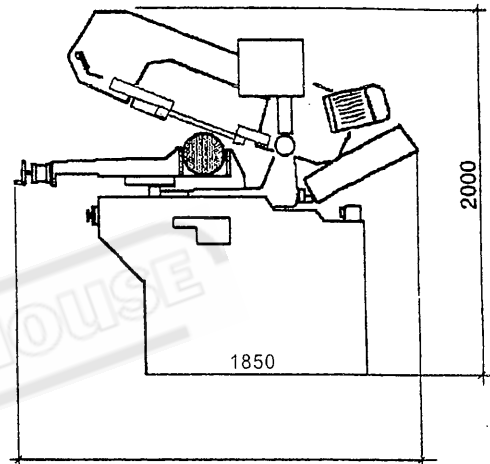

4.2 - Transport and handling of the machine

If the machine has to be shifted in its own packing, use a forklift truck or sling it with straps as illustrated.

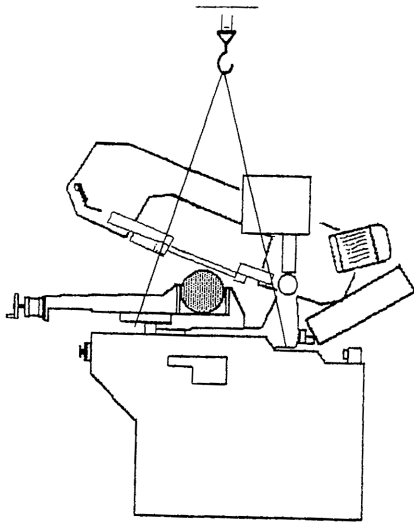


4.3 - Minimum requirements for the premises housing the machine

- Mains voltage and frequency complying with the machine motor characteristics.
- Environment temperature from -10°C to +50°C.
- Relative humidity not over 90%

4.4 - Instructions for electrical connection

- The machine is not provided with an electric plug, so the customer must fit a suitable one for his own working conditions:

1 - WIRING DIAGAM FOR 4-WIRE SYSTEM FOR THREE-PHASE MACHINE-SOCKET FOR A 16A PLUG



4.5 - Instructions for assembly of the loose parts and accessories

Fit the components supplied as indicated in the photo:

- Mount bar-stop rod
- Mount and align the roll supporting arm as per the countervice table.

4.6 - Disactivating the machine

- If the sawing machine is to be out of use for a long period, it is advisable to proceed as follows:
 - 1) detach the plug from the electric supply panel
 - 2) loosen blade
 - 3) release the arch return spring
 - 4) empty the coolant tank
 - 5) carefully clean and grease the machine
 - 6) if necessary, cover the machine.

4.7 - Dismantling

(because of deterioration and/or obsolescence)

General rules

If the machine is to be permanently demolished and/or scrapped, divide the material to be disposed of according to type and composition, as follows:


- 1) Cast iron or ferrous materials, composed of metal alone, are **secondary raw materials**, so they may be taken to an iron foundry for re-smelting after having removed the contents (classified in point3);
- 2) electrical components, including the cable and electronic material (magnetic cards, etc.), fall within the category of material classified as being assimilable to urban waste according to the laws of the European community, so they may be set aside for collection by the public waste disposal service;
- 3) old mineral and synthetic and/or mixed oils, emulsified oils and greases are special refuse, so they must be collected, transported and subsequently disposed of by the old oil disposal service.

NOTE:since standards and legislation concerning refuse in general is in a state of contiunous evolorion and therefore subject to vhanges and variations, the user must keep informed of the regulations in force at the time of disposing of the machine tool, as these may differ from those described above, which are to be considered as a general guide line.

5 MACHINE FUNCTIONAL PARTS


5.1 - Operating head or saw frame

- Machine part consisting of the members that transfer the motion (gearmotor, flywheels), and tension/guide (blade-guides, blade tension slide) and lowering control (optional) of tool.

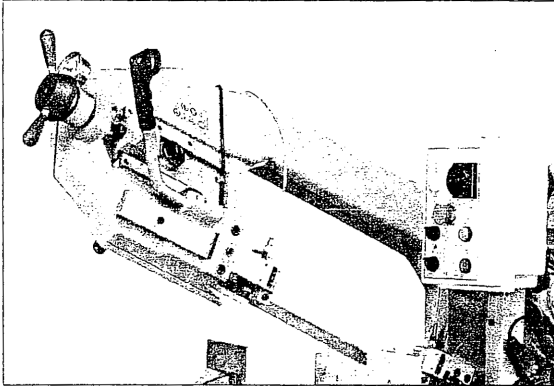


5.3 - Bed

- Support structure for the OPERATING HEAD OR SAW FRAME (rotating arm for gradual cutting, with respective blocking system), the ELECTRIC BOX, the VICE, the BAR STOP, the material support ROLLER and the housing for the cutting coolant TANK and pump.

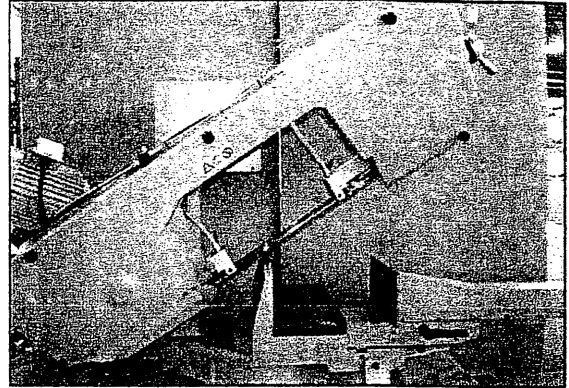

5.2- Vice

- System for clamping the material during the cutting operation, operated with approach handwheel and locking lever or by a pneumatic device (optional).

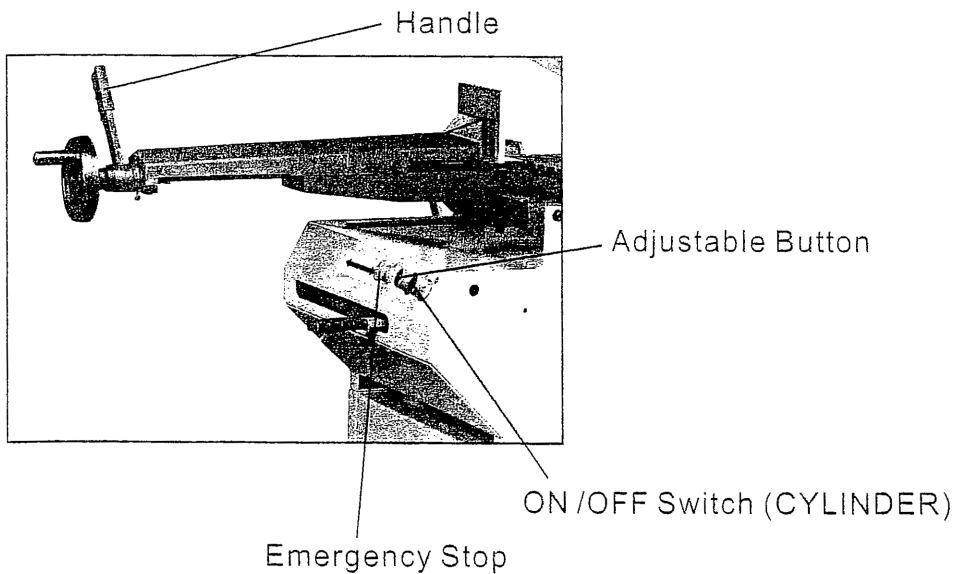

6 DESCRIPTION OF THE OPERATING CYCLE

Before operating, all the main organs of the machine must be set in optimum conditions (see the chapter on "Regulating the machine").

6.1 - Starting up and cutting cycle

CUTTING CYCLE


- Manual vice locking;
 - Manual sawframe downfeed;
 - Manual sawframe lift;
 - Manuale vice opening.
- Make sure the machine is not in emergency stop; if so, release the red mushroom push-button.
 - Rotate the band tightening flywheel (2) counterclockwise and the rapid tightening lever towards the left against the mechanical stop
 - Select the cutting speed on switch

position 1 = 36 m/min

position 2 = 72 m/min

ATTENTION: Make sure that the vice has been positioned to the far right or left of the countervise to avoid accidental impact with the sawblade. ALSO make sure that the relevant lever has been locked (also see Chapter 7 paragraph 7.4).

- Place the piece to be cut inside the vice by moving jaw to about 3-4mm and lock with lever(8).
- Stricke the strat/reset push-button
- If saw is supplied with a saw frame lowering control device, adjust it so as to suit the feaures and the shape of the material to be cut.
- Reach for handgrip (7) of the SAW FRAME control lever, strike the push-button and check that the blade is tuming in the direction indicated (if not, invert the tow phase leads);
- Make sure that the cooling liquid flows regularly.

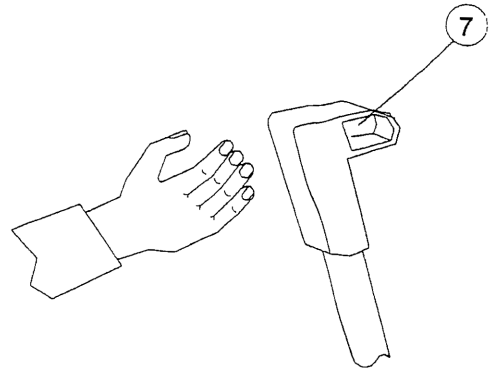

The band saw is now ready to start work, bearing in mind that the CUTTING SPEED and the TYPE of BLADE - combined with a suitable descent of the head - are of decisive importance for cutting quality and for machine performance (for further details on this topic, see below in the chapter on "Material classification and blade selection").

- When starting to cut with a new blade, in order to safeguard its life and efficiency, the first two or three cuts must be made while exerting a slight pressure on the part, so that the time taken to cut is about double the normal time (see below in the chapter on "Material classification and blade selection" in the section on Blade running-in).
- Press the red emergency button when there are conditions of danger or malfunctions in general, so as to stop machine operation immediately.

6.2. Foundation requirement

The foundation of the machine should be concrete with 150mm in depth. No special vibration absorption rubber is needed.



6.3. Unpacking

(Pile 2 sets only)

Removing first the top cover of the wooden case, carefully taking out fittings, stripping the side plates, then hoist the machine to its position.



Keep your hands off the cutting area

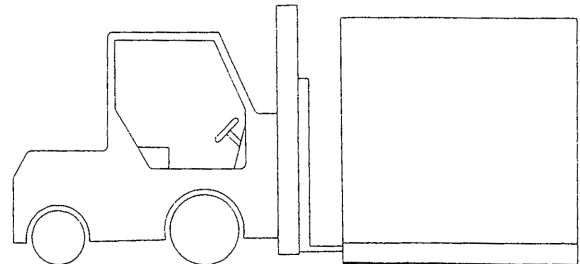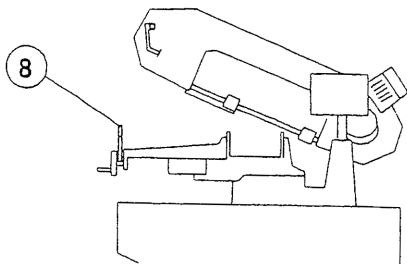


7 REGULATING THE MACHINE

7.1 - Blade tension assembly

The ideal tightening of the blade is achieved by rotating the blade tightening handwheel (B) towards the left against the mechanical stop pin. Ideal tightening of the blade read on the relative pressure bar (C)

Note: In case the saw is not used for a period of time, release blade pressure to the green area.

Always use blade having the dimensions specified in this manual.

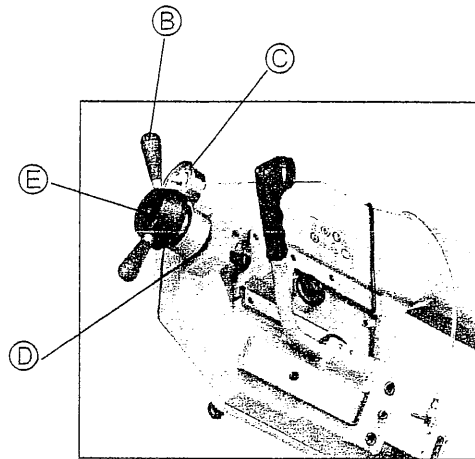

7.2 - Restoring oil level on blade tightening cylinder

The blade pressure can be read on the pressure gauge (C), mounted on the relative blade tightening cylinder allowing constant display of the blade tension.

Ideal tightening of the blade

Should any problems in the monitoring of the tension occur, this may be caused by the reduced capacity inside the blade tightening cylinder due to an oil leak.


Simply push the blade tightening cylinder stem (E) back into place and then restoring oil level through plug(D).

Use SHELL HYDRAULIC OIL 32 type oil or similar.

When this operation has been completed close the plug(D) and tighten the blade.

7.3-Blade guide blocks

The blade is guided by means of adjustable pads set in place during inspection as per the thickness of the blade with minimum play as shown in the figure.

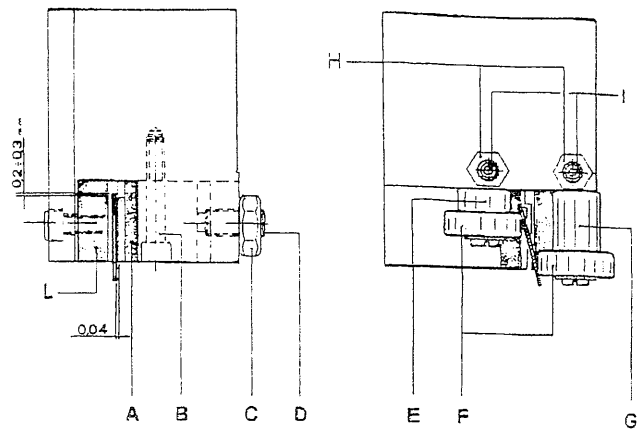

In case the blade needs to be replaced, make sure to always install 0.9 mm thick blades for which the blade guide pads have been adjusted. In the case of toothed blades with different thicknesses adjustment should be carried out as follows:

- Loosen nut(C), screw(B) and loosen dowel(D) widening the passage between the pads.
- Loosen the nuts(H) and the dowels(I) and rotate the pins (E-G) to widen the passage between the bearings(F).
- Mount the new blade, place the pad(A) on the blade and, loosening the dowel, allow a play of 0.04 mm for the sliding of the toothed blade; lock the relative nut and screw(B):
- Rotate the pins (E-G) until the bearings rest against the blade as indicated in the figure and then secure the dowels (I) and nut(H).
- Make sure that between the blade and the upper teeth of the pad(L) this is at least 0.2 - 0.3mm of play; if necessary, loosen the screws that fasten the blocks and adjust accordingly.

BEFORE PERFORMING THE FOLLOWING OPERATIONS, THE ELECTRIC POWER SUPPLY AND THE POWER CABLE MUST BE COMPLETELY DISCONNECTED.


7.8 - Changing the blade

In case the blade is replaced:

- Lift the saw frame in upmost position.
- Loosen the blade with the handwheel, remove the mobile blade-guide cover, open the flywheel guard and remove the old blade from the flywheels and the blade guide blocks.
- Install the new blade by threading it into the bloc bearings and then inside the flywheel races. Make sure that teeth are in the cutting direction.
- Tighten blade and make sure that it perfectly fits inside the race of the flywheels.
- Mount the mobile blade-guide cover and close the flywheel guard with the relative clips and check that the safety microswitches are actuated otherwise the machine will not start when you restore electrical connections.

WARNING: always assemble blades having dimensions specified in this manual and for which the blade guide heads have be set: otherwise, see chapter on "Description of the operating cycle" in the section Starting-up.

CUTTING DIRECTION

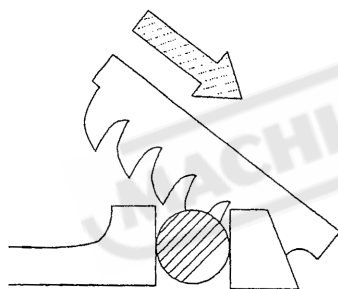

7.9-Replacing saw frame return spring

- When performing this operation it is necessary to keep saw frame up using the lifting device.
- Replace the spring by loosening the upper coupling rod and releasing it from the lower tie-rod.

ROUTINE 8 AND SPECIAL MAINTENANCE

THE MAINTENANCE JOBS ARE LISTED BELOW, DIVIDED INTO DAILY, WEEKLY, MONTHLY AND SIX-MONTHLY INTERVALS. IF THE FOLLOWING OPERATIONS ARE NEGLECTED, THE RESULT WILL BE PREMATURE WEAR OF THE MACHINE AND POOR PERFORMANCE.

8.1 - Daily maintenance

- General cleaning of the machine to remove accumulated shavings.
- Clean the lubricating coolant drain hole to avoid excess fluid.
- Top up the level of lubricating coolant.
- Check blade for wear.
- Rise of saw frame to top position and partial slackening of the blade to avoid useless yield stress.
- Check functionality of the shields and emergency stops.

8.2 - Weekly maintenance

- More accurate general cleaning of the machine to remove shavings, especially from the lubricant fluid tank.
- Removal of pump from its housing, cleaning of the suction filler and suction zonz.
- Clean the filter of the pump suction head and the suction area.
- Cleaning with compressed air the blade guide heads (guide bearings and drain hole of the lubricating cooling).
- Cleaning flywheel housings and blade sliding surfaces on flywheels.
- Check condition of the blade cleaning brushes.

8.3 - Monthly maintenance

- Check the tightening of the motor flywheel screws.
- Check that the blade guide bearings on the heads are perfect running condition.
- Check the tightening of the screws of the gearmotor, pump and accident protection guarding.

8.4 - Six-monthly maintenance

REDUCTION UNIT

- The worm drive gear box mounted on the machine is maintenance-free guaranteed by its manufacture.
- Continuity test of the equipotential protection circuit.

8.5 - Oils for lubricating coolant

Considering the vast range of products on the market, the user can choose the one most suited to his own requirements, using as reference the type SHELL LUTEM OIL ECO.
THE MINIMUM PERCENTAGE OF OIL DILUTED IN WATER IS 8-10 %.

8.6 - Oil disposal

The disposal of these products is controlled by strict regulations. Please see the chapter on "Machine dimensions - Transport - Installation" in the section on *Dismantling*.

8.7 - Special maintenance

Special maintenance operations must be carried out by skilled personnel. However, we advise contacting their dealer and/or importer. Also the reset of protective and safety equipment and devices, of the reducer, the motor, the motor pump and electric components is to be considered extraordinary maintenance.

9 MATERIAL CLASSIFICATION AND CHOICE OF TOOL

Since the aim is to obtain excellent cutting quality, the various parameters such as hardness of the material, shape and thickness, transverse cutting section of the part to be cut, selection of the type of cutting blade, cutting speed and control of saw frame lowering. These specifications must therefore be harmoniously combined in a single operating condition according to practical considerations and common sense, so as to achieve an optimum condition machine when there are many variations in the job to be performed. The various problems that crop up from time to time will be solved more easily if the operator has a good knowledge of these specifications.

WE THEREFORE RECOMMEND YOU TO ALWAYS USE GENUINE SPARE BLADES THAT GUARANTEE SUPERIOR QUALITY AND PERFORMANCE.

9.1- Definition of materials

The table at the foot of this page lists the characteristics of the materials to be cut, so as to choose the right tool to use.

9.2 - Selecting blade

First of all the pitch of the teeth must be chosen, in the other

words, the number of teeth per inch(25.4mm) suitable for the material to be cut, according to these criteria:

- parts with a thin and/or variable section such as profiles, pipes and plate, need close toothing, so that the number of teeth used simultaneously in cutting is from 3 to 6;
- parts with large transverse sections and solid sections need widely spaced toothing to allow for the greater volume of the shavings and better tooth penetration;
- parts made of soft material or plastic (light alloys, mild bronze, teflon, wood, etc.) also require widely spaced toothing;
- pieces cut in bundles require combo tooth design.

9.3 - Teeth pitch

As already stated, this depends on the following factors:

- **hardness of the material**
- **dimensions of the section**
- **thickness of the wall.**


THICKNESS MM	Z CONTINUOUS TOOTH DESIGN	Z COMBO TOOTH DESIGN
TILL 1.5	14	10/14
FROM 1 TO 2	8	8/12
FROM 2 TO 3	6	6/10
FROM 3 TO 5	6	5/8
FROM 4 TO 6	6	4/6
MORE THAN 6	4	4/6

S = THICKNESS

TYPES OF STEEL						CHARACTERISTICS		
USE	I UNI	D DIN	F AF NOR	GB SB	USA AISI-SAE	Hardness ROCKWELL HRB	Hardness ROCKWELL HRB	R=N/mm2
Construction steels	Fe360	St37	E24	---	---	116	67	360+480
	Fe430	St44	E28	43	---	148	80	430+560
	Fe510	St52	E36	50	---	180	88	510+660
Carbon Steels	C20	CK20	XC20	060 A 20	1020	198	93	540+690
	C40	CK40	XC42H1	060 A 40	1040	198	93	700+840
	C50	CK50	---	---	1050	202	94	760+900
	C60	CK60	XC55	060 A 62	1060	202	94	830+980
Spring steels	50CrV4	50CrV4	50CV4	735 A 50	6150	207	95	1140+1330
	60SiCr8	60SiCr7	---	---	9262	224	98	1220+1400
Alloyed steels for hardening and tempering and for nitriding	35CrMo4	34CrMoO4	35CD4	708 A 37	4135	220	98	780+930
	39NiCrMo4	36CrNiMoO4	39NCD4	---	9840	228	99	880+1080
	41CrAlMo7	41CrAlMo7	40CADG12	905 M 39	---	232	100	930+1130
Alloyed casehardening steels	18NiCrMo7	---	20NCD7	En 325	4320	232	100	760+1030
	20NiCrMo2	21NiCrMo2	20NCD2	805 H 20	4315	224	98	690+980
Alloyed for bearings	100Cr6	100Cr6	100C6	534 A 99	52100	207	95	690+980
Tool steel	52NiCrMoKU	56NiCrMoV7C100K	---	---	---	244	102	800+1030
	C100KU	C100W1	---	BS1	S-1	212	96	710+980
	X210Cr13KU	X210Cr12	Z200C12	BD2-BD3	D6-D3	252	103	820+1060
	58SiMo8KU	---	Y60SC7	---	S5	244	102	800+1030
Stainless steels	X12Cr13	4001	---	---	410	202	94	670+885
	X5CrNi1810	4301	Z5CN18.09	304 C 12	304	202	94	590+685
	X8CrNi1910	---	---	---	---	202	94	540+685
	X8CrNiMo1713	4401	Z6CDN17.12	316 S 16	316	202	94	490+685
Copper alloys Special brass Bronze	Aluminium copper alloy G-CuAl11Fe4Ni4 UNI 5275					220	98	620+685
	Special manganese/silicon brass G-CuZn36Si1Pb1 UNI5038					140	77	375+440
	Manganese bronze SAE43 - SAE430					120	69	320+410
	Phosphor bronze G-CuSn12 UNI 7013/2a					100	56.5	265+314
Cast iron	Gray pig iron		G25			212	96	245
	Spheroidal graphite cast iron		GS600			232	100	600
	Malleable cast iron		W40-05			222	98	420

Set

Saw teeth bent out of the plane of the saw body, resulting in a wide cut in the workpiece.




REGULAR OR RAKER SET: Cutting teeth right and left, alternated by a straight tooth.



Of general use for materials with dimensions superior to 5 mm. Used for the cutting of steel, castings and hard nonferrous materials.

WAVY SET: Set in smooth waves.



This set is associated with very fine teeth and it is mainly used for the cutting of pipes and thin section bars (from 1 to 3 mm).

ALTERNATE SET (IN GROUPS): Groups of cutting teeth right and left, alternated by a straight tooth.



This set is associated with very fine teeth and it is used for extremely thin materials (less than 1 mm).

ALTERNATE SET (INDIVIDUAL TEETH): Cutting teeth right and left.




This set is used for the cutting of nonferrous soft materials, plastics and wood.

9.7.1 - RECOMMENDED CUTTING PARAMETERS


STEEL	CUTTING SPEED	LUBRICATION
CONSTRUCTION	60/80	EMULSIFIABLE OIL
CEMENTATION	40/50	EMULSIFIABLE OIL
CARBON STEEL	40/60	EMULSIFIABLE OIL
HARDENING AND TEMPERING	40/50	EMULSIFIABLE OIL
BEARINGS	40/60	EMULSIFIABLE OIL
SPRINGS	40/60	EMULSIFIABLE OIL
FOR TOOLS	30/40	EMULSIFIABLE OIL
FOR VALES	35/50	EMULSIFIABLE OIL
STAINLESS STEEL	30/40	EMULSIFIABLE OIL
SPHEROIDAL GRAPHITE	20/40	EMULSIFIABLE OIL
CAST IRON	40/60	EMULSIFIABLE OIL
ALUMINIUM	80/600	KEROSENE
BRONZE	70/120	EMULSIFIABLE OIL
HARD BRONZE	30/60	EMULSIFIABLE OIL
BRASS	70/350	EMULSIFIABLE OIL
COPPER	50/720	EMULSIFIABLE OIL

ELECTRICAL CIRCUIT DIAGRAM EB-320DS AC380V / 3PH

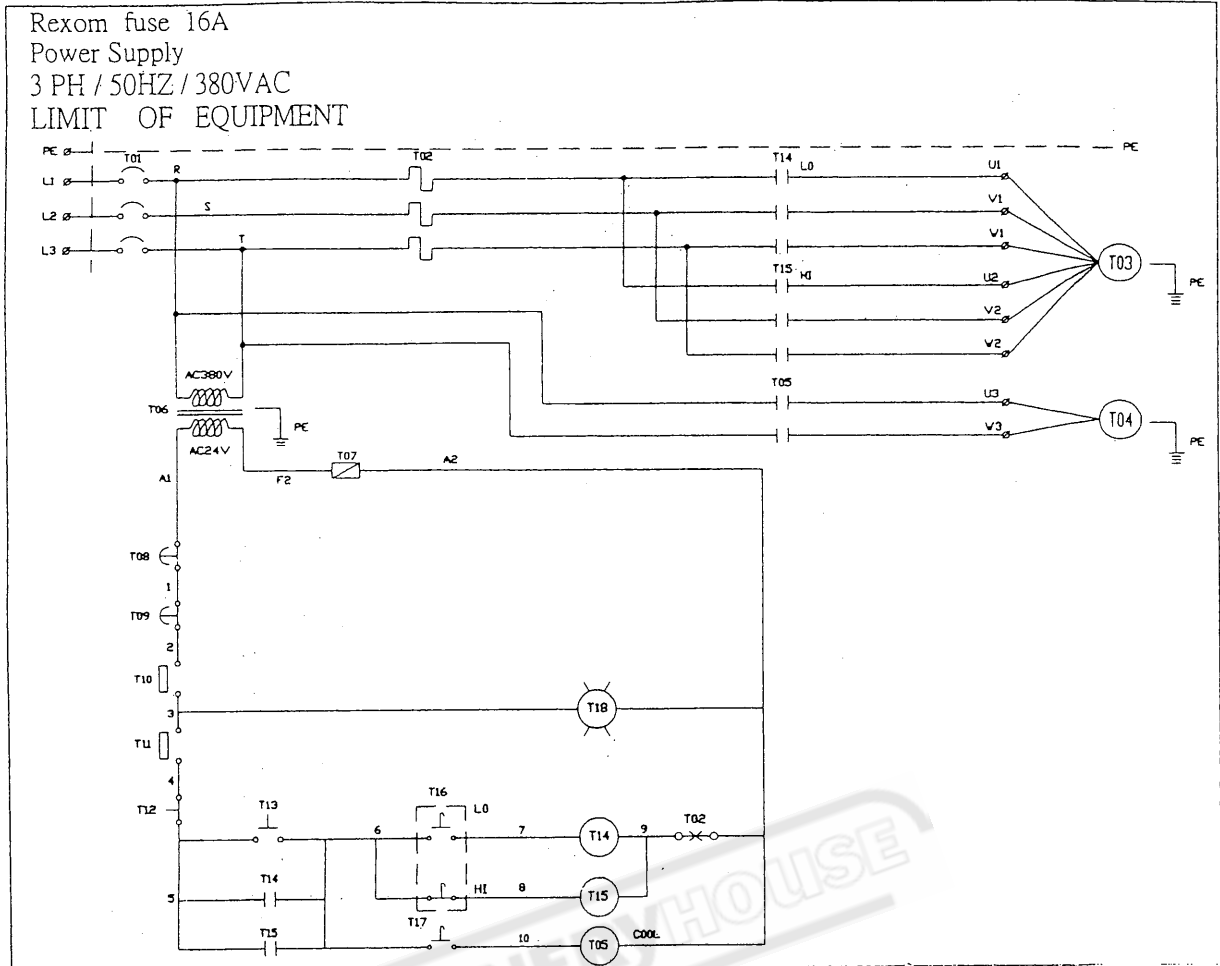

Electrical parts list


Part No	Name	Dscription	Producer	Mark
T01	POWER	CAM SWITCH	SAIZER	CE
T02	OL	OL	SHIHLIN	CE
T03	M1	SAW MOTOR	GOROGE	CE
T04	M2	PUMP MOTOR	GOROGE	CE
T05	MS3	RELAY 12A	RY	CE
T06	TR	TRANSFORMER	GOROGE	CE
T07	F1	FUSE	DEMEX	CE
T08	EMS1	EMERGENCY STOP	CIRO	CE
T09	EMS2	EMERGENCY STOP	CIRO	CE
T10	SAFE MICRO	MICRO SWITCH	HAILY	CE
T11	DOWN MICRO	MICRO SWITCH	CIAO TEN	CE
T12	OFF	O SWITCH	TELEMECANIQUE	CE
T13	ON	I SWITCH	TELEMECANIQUE	CE
T14	MS1	MS	SHIHLIN	CE
T15	MS2	MS	SHIHLIN	CE
T16	SPEED	SPEED SWITCH	TELEMECANIQUE	CE
T17	COOL	PUMP SWITCH	TELEMECANIQUE	CE
T18	LAMP	POWER LAMP	TELEMECANIQUE	CE

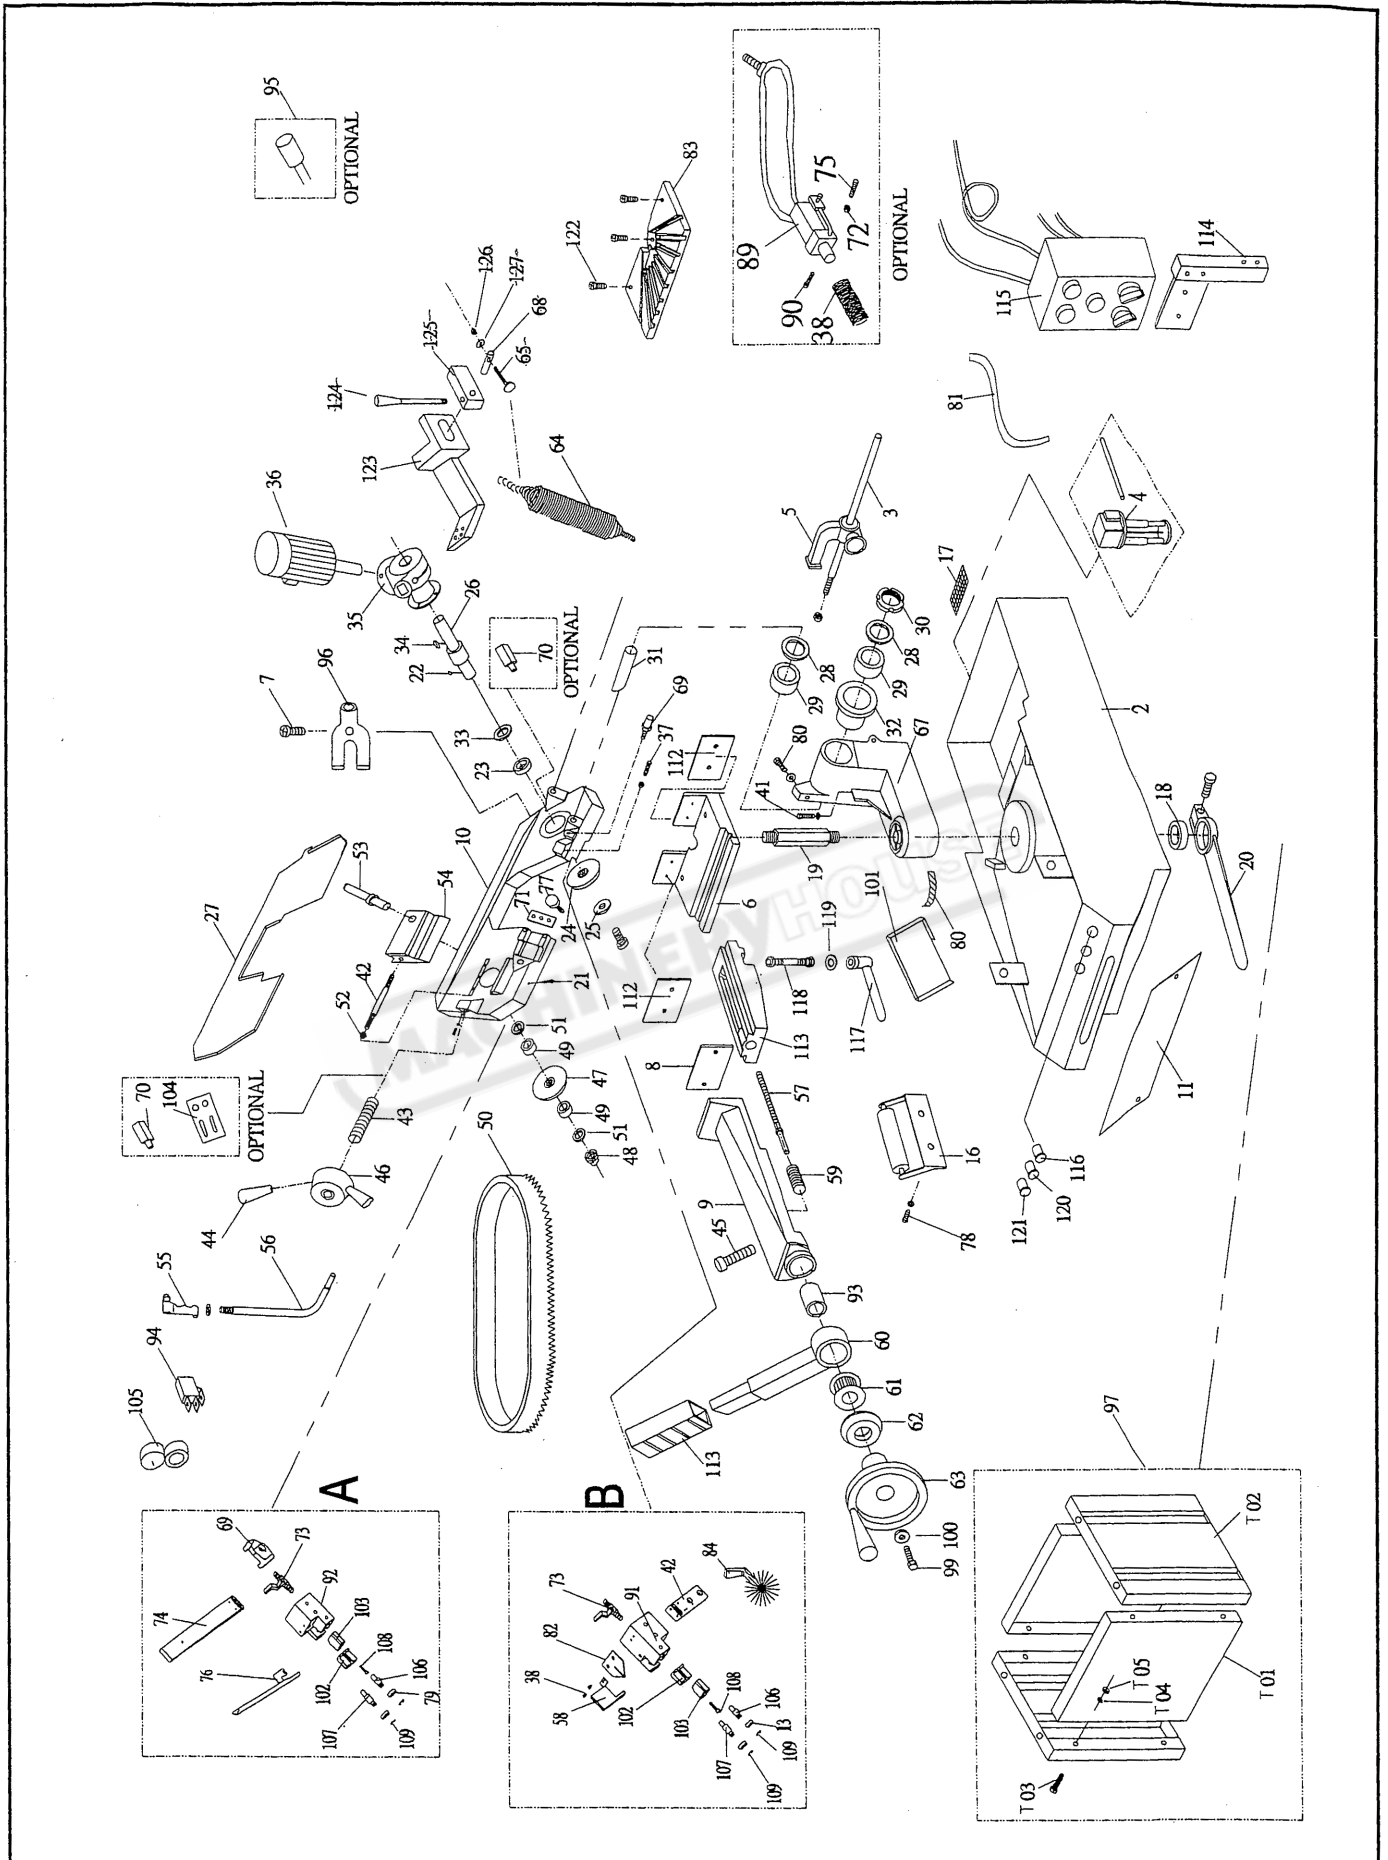

PARTS LIST EB-320DS

Ref. No. Description	Ref. No. Description	Ref. No. Description
1. Washer	44. Grip	87. Scale
2. Base	45. Pin	89. Hydraulic cylinder
3. Bar stop rod	46. Handwheel	90. Pin
4. Cool pump	47. Return flywheel	91. Fixed bladeguide plate
5. Bar stop	48. Hex. nut	92. Mobile bladeguide plate
6. Countervice	49. Bearings 2Z	93. Bush
7. Screw M5	50. Saw blade	94. Toger switch
8. Vice jaw	51. C-ring	95. Condenser(motor)(optional)
9. Vice	52. Hex. nuts	96. Coolant distributor
10. Body frame	53. Blade sheel shaft	97. Stand
11. Casing	54. Block blade tension	98. Nut M10
12. Motor Fan	55. Handle	99. Screw M8*15
13. Motor Cover	56. Lever	100. Washer
14. Connection Plate	57. Vice screw	101. Plate
16. Rollerway	58. R. Bladeguard	102. Bladeguard unit square
17. Filter	59. Vice spring	103. Bladeguard unit
18. Bush	60. Vice lever	104. Blade tension guide
19. Pin	61. Bearing	105. Blade tension gauge (optional)
20. Lever	62. Bearing cover	106. Guide pivot
21. Knob	63. Vice handwheel	107. Guide pivot
22. Key 7x7	64. Spring	108. 33MM*MS screw
23. Bearing	65. Screw	109. C-ring
24. Motor flywheel	67. Revolving arm	110. Vice piece
25. Washer	68. Shaft	111. Screw
26. Shaft	69. Stop bolt	112. Vice jaw
27. Blade cover	70. Micro switch(optional)	113. Vice sliding seat
28. Ring nilons	71. Block	114. Switch Bracket
29. Bearing 32006	72. Hex. nuts	115. Electrical box
30. Ring nut M30	73. Rubber connection	116. On /Off Oil Switch
31. Pivot	74. Arm	117. Handle
32. Bearing cover	75. Bolt	118. Bolt
33. Washer	76. Blade guard	119. Washer
34. Key 4x25	77. Handle	120. Adjusting Button
35. Reducer	78. Screw M10	121. Emergency Stop
36. Motor	79. Bearing 6082Z	122. Screw
37. Screw	80. Screw M8	123. Bracket
38. Spring	81. Water pipe	124. Handle
39. Plug	82. Rust plate	125. Square
40. Micro switch(optional)	83. Vice pad	126. Nut
41. Screw M8	84. Bush	127. Washer
42. Threaded shaft	85. Switch set	
43. Spring washer	86. 24V switch set	

MACHINERYHOUSE

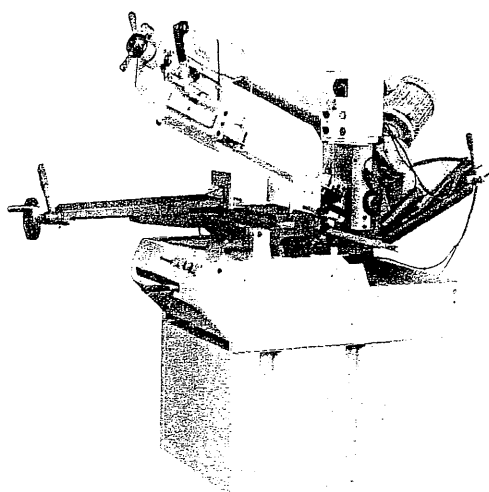

**METAL CUTTING
BAND SAW MACHINE
EB-320DS**

Instruction Manual

Standard Equipment

Bimetal saw blade

Cooling pump

Magnetic switch & CE

Stand