



OPERATOR'S MANUAL

Metal Working



LOWER THROAT METAL BEAD ROLLER MODEL: BR-16E-36LT (B8680)

www.machineryhouse.com.au



Table of Contents

INTRODUCTION.....	1
GENERAL NOTES.....	1
SAFETY INSTRUCTIONS	2
SAFETY PRECAUTIONS	4
Dear Valued Customer:.....	4
TECHNICAL SPECIFICATIONS.....	6
UNPACKING AND CHECKING CONTENTS.....	7
Cleaning	7
TRANSPORTING AND LIFTING	8
INSTALLATION.....	9
ELECTRICAL.....	10
GENERAL BEAD ROLLING	12
ROLLER INSTALLATION AND REMOVAL	12
OPERATION.....	13
Controls	13
Rolling	13
Offsetting the Rolls	15
Support Tray.....	16
MATERIAL SELECTION.....	17
UNDERSTANDING SPRINGBACK	17
LUBRICATION AND MAINTENANCE	18
OPTIONAL TOOLING AVAILABLE.....	19
FRAME ASSEMBLY	21
SHAFT HOUSING ASSEMBLY	22
LOWER SHAFT ASSEMBLY.....	23
CAM HOUSING ASSEMBLY	24
INTERMEDIATE SHAFT ASSEMBLY	25
TOP SHAFT ASSEMBLY.....	26
BEARING BLOCK ASSEMBLY.....	27
FENCE ASSEMBLY.....	28
Parts List	29



INTRODUCTION

The quality and reliability of the components assembled on a Baileigh Industrial machine guarantee near perfect functioning, free from problems, even under the most demanding working conditions. However if a situation arises, refer to the manual first. If a solution cannot be found, contact the distributor where you purchased our product. Make sure you have the serial number and production year of the machine (stamped on the nameplate). For replacement parts refer to the assembly numbers on the parts list drawings.

Our technical staff will do their best to help you get your machine back in working order.

In this manual you will find: (when applicable)

- Safety procedures
- Correct installation guidelines
- Description of the functional parts of the machine
- Capacity charts
- Set-up and start-up instructions
- Machine operation
- Scheduled maintenance
- Parts lists

GENERAL NOTES

After receiving your equipment remove the protective container. Do a complete visual inspection, and if damage is noted, **photograph it for insurance claims** and contact your carrier at once, requesting inspection. Also contact your distributor and inform them of the unexpected occurrence. Temporarily suspend installation.

Take necessary precautions while loading / unloading or moving the machine to avoid any injuries.

Your machine is designed and manufactured to work smoothly and efficiently. Following proper maintenance instructions will help ensure this. Try and use original spare parts, whenever possible, and most importantly; **DO NOT** overload the machine or make any unauthorized modifications.




Note: This symbol refers to useful information throughout the manual.



IMPORTANT

PLEASE READ THIS OPERATORS MANUAL CAREFULLY

It contains important safety information, instructions, and necessary operating procedures. The continual observance of these procedures will help increase your production and extend the life of the equipment.



SAFETY INSTRUCTIONS

LEARN TO RECOGNIZE SAFETY INFORMATION

This is the safety alert symbol. When you see this symbol on your machine or in this manual, **BE ALERT TO THE POTENTIAL FOR PERSONAL INJURY!**

Follow recommended precautions and safe operating practices.

UNDERSTAND SIGNAL WORDS

A signal word – **DANGER**, **WARNING**, or **CAUTION** is used with the safety alert symbol. **DANGER** identifies a hazard or unsafe practice that will result in severe **Injury or Death**.

Safety signs with signal word **DANGER** or **WARNING** are typically near specific hazards.

General precautions are listed on **CAUTION** safety signs. **CAUTION** also calls attention to safety messages in this manual.



DANGER



WARNING



CAUTION




SAVE THESE INSTRUCTIONS.
Refer to them often and use them to instruct others.




PROTECT EYES

Wear safety glasses or suitable eye protection when working on or around machinery.

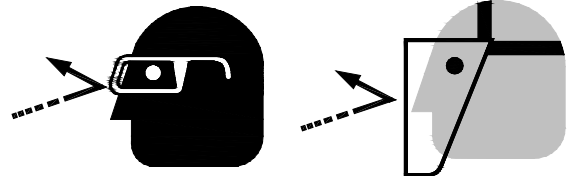


PROTECT AGAINST NOISE

Prolonged exposure to loud noise can cause impairment or loss of hearing. Wear suitable hearing protective devices such as ear muffs or earplugs to protect against objectionable or uncomfortable loud noises.




BEWARE OF PINCH POINTS

Keep hands and fingers away from the rolls when the machine is in operation.




Keep hands and fingers clear of any gears or mechanisms. Make sure guard is in place before operating machine.



BEWARE OF PINCH POINTS AND CRUSH HAZARD

Keep hands and fingers from between the roller and die when bending materials to avoid possible injury.



NEVER place your hands, fingers, or any part of your body in the die area of this machine.



SAFETY PRECAUTIONS



Metal working can be dangerous if safe and proper operating procedures are not followed. As with all machinery, there are certain hazards involved with the operation of the product. Using the machine with respect and caution will considerably lessen the possibility of personal injury. However, if normal safety precautions are overlooked or ignored, personal injury to the operator may result.

Safety equipment such as guards, hold-downs, safety glasses, dust masks and hearing protection can reduce your potential for injury. But even the best guard won't make up for poor judgment, carelessness or inattention. **Always use common sense** and exercise **caution** in the workshop. If a procedure feels dangerous, don't try it.

REMEMBER: Your personal safety is your responsibility.



WARNING: FAILURE TO FOLLOW THESE RULES MAY RESULT IN SERIOUS PERSONAL INJURY

Dear Valued Customer:

- All Baileigh machines should be used only for their intended use.
- Baileigh does not recommend or endorse making any modifications or alterations to a Baileigh machine. Modifications or alterations to a machine may pose a substantial risk of injury to the operator or others and may do substantial damage to the machine.
- Any modifications or alterations to a Baileigh machine will invalidate the machine's warranty.

PLEASE ENJOY YOUR BAILEIGH MACHINE! ...PLEASE ENJOY IT SAFELY!

1. **FOR YOUR OWN SAFETY, READ INSTRUCTION MANUAL BEFORE OPERATING THE MACHINE.** Learn the machine's application and limitations as well as the specific hazards.
2. **Only trained and qualified personnel can operate this machine.**
3. **Make sure guards are in place and in proper working order before operating machinery.**
4. **Remove any adjusting tools.** Before operating the machine, make sure any adjusting tools have been removed.
5. **Keep work area clean.** Cluttered areas invite injuries.
6. **Overloading machine.** By overloading the machine you may cause injury from flying parts. **DO NOT** exceed the specified machine capacities.



7. **Dressing material edges.** Always chamfer and deburr all sharp edges.
8. **Do not force tool.** Your machine will do a better and safer job if used as intended. **DO NOT** use inappropriate attachments in an attempt to exceed the machines rated capacity.
9. **Use the right tool for the job. DO NOT** attempt to force a small tool or attachment to do the work of a large industrial tool. **DO NOT** use a tool for a purpose for which it was not intended.
10. **Dress appropriate. DO NOT** wear loose fitting clothing or jewelry as they can be caught in moving machine parts. Protective clothing and steel toe shoes are recommended when using machinery. Wear a restrictive hair covering to contain long hair.
11. **Use eye and ear protection.** Always wear ISO approved impact safety goggles. Wear a full-face shield if you are producing metal filings.
12. **Do not overreach.** Maintain proper footing and balance at all times. **DO NOT** reach over or across a running machine.
13. **Stay alert.** Watch what you are doing and use common sense. **DO NOT** operate any tool or machine when you are tired.
14. **Check for damaged parts.** Before using any tool or machine, carefully check any part that appears damaged. Check for alignment and binding of moving parts that may affect proper machine operation.
15. **Observe work area conditions. DO NOT** use machines or power tools in damp or wet locations. Do not expose to rain. Keep work area well lighted. **DO NOT** use electrically powered tools in the presence of flammable gases or liquids.
16. **Keep children away.** Children must never be allowed in the work area. **DO NOT** let them handle machines, tools, or extension cords.
17. **Store idle equipment.** When not in use, tools must be stored in a dry location to inhibit rust. Always lock up tools and keep them out of reach of children.
18. **DO NOT operate machine if under the influence of alcohol or drugs.** Read warning labels on prescriptions. If there is any doubt, **DO NOT** operate the machine.
19. **Turn off** power before checking, cleaning, or replacing any parts.
20. Be sure **all** equipment is properly installed and grounded according to national, state, and local codes.
21. Inspect power and control cables periodically. Replace if damaged or bare wires are exposed. **Bare wiring can kill!** **DO NOT** touch live electrical components or parts.
22. **DO NOT** bypass or defeat any safety interlock systems.
23. Keep visitors a safe distance from the work area.



TECHNICAL SPECIFICATIONS

This bead roller is power driven and will form sheet metal up to 16 Gauge thickness mild steel (or equivalent). Available die sets allow for the following operations to be performed: wiring, edging, ogee bead, single bead, and elbow edging.

Capacity, Mild Steel	16ga. (.0598") (1.52mm)
Capacity, Aluminum	14ga. (.0641") (1.63mm)
Throat Depth	36" (914mm)
Arbor Diameter	.875" (22mm)
Standard Roll Diameter	2.5" (63.5mm)
Power	240VAC, 50hz
Motor HP	1/2hp (.37kw) 240V, 3ph
Shipping Dimensions (L x W x H)	60" x 44" x 68" (1524 x 1118 x 1727mm)
Weight	300lbs. (137kg)

- Inverter driven variable speed foot pedal control
- Forward and reverse rotation
- Left or right hand operator controls
- Quick release top roll
- Adjustable depth on bottom roll
- Depth stop included



Note: The photos and illustrations used in this manual are representative only and may not depict the actual color, labeling or accessories and may be intended to illustrate technique only.



Note: The specifications and dimensions presented here are subject to change without prior notice due to improvements of our products.



UNPACKING AND CHECKING CONTENTS

Your Baileigh machine is shipped complete. Separate all parts from the packing material and check each item carefully. Make certain all items are accounted for before discarding any packing material.



WARNING: SUFFOCATION HAZARD! Immediately discard any plastic bags and packing materials to eliminate choking and suffocation hazards to children and animals.

If any parts are missing, **DO NOT** place the machine into service until the missing parts are obtained and installed correctly.

Cleaning



WARNING: DO NOT USE gasoline or other petroleum products to clean the machine. They have low flash points and can explode or cause fire.



CAUTION: When using cleaning solvents work in a well-ventilated area. Many cleaning solvents are toxic if inhaled.

Your machine may be shipped with a rustproof waxy coating and/or grease on the exposed unpainted metal surfaces. Fully and completely remove this protective coating using a degreaser or solvent cleaner. Moving items will need to be moved along their travel path to allow for cleaning the entire surface. For a more thorough cleaning, some parts will occasionally have to be removed. **DO NOT USE** acetone or brake cleaner as they may damage painted surfaces.

Follow manufacturer's label instructions when using any type of cleaning product. After cleaning, wipe unpainted metal surfaces with a light coating of quality oil or grease for protection.



Important: This waxy coating is **NOT** a lubricant and will cause the machine to stick and lose performance as the coating continues to dry.






TRANSPORTING AND LIFTING



IMPORTANT: *Lifting and carrying operations should be carried out by skilled workers, such as a truck operator, crane operator, etc. If a crane is used to lift the machine, attach the lifting chain carefully, making sure the machine is well balanced.*

Follow these guidelines when lifting with truck or trolley:

- The lift truck must be able to lift at least 1.5 – 2 times the machines gross weight.
- Make sure the machine is balanced. While transporting, avoid rough or jerky motion, and maintain a safe clearance zone around the transport area.
- Use a fork lift with sufficient lifting capacity and forks that are long enough to reach the complete width of the machine.
- Remove the securing bolts that attach the machine to the pallet.
- Approaching the machine from the side, lift the machine on the frame taking care that there are no cables or pipes in the area of the forks.
- Move the machine to the required position and lower gently to the floor.
- Level the machine so that all the supporting feet are taking the weight of the machine and no rocking is taking place.

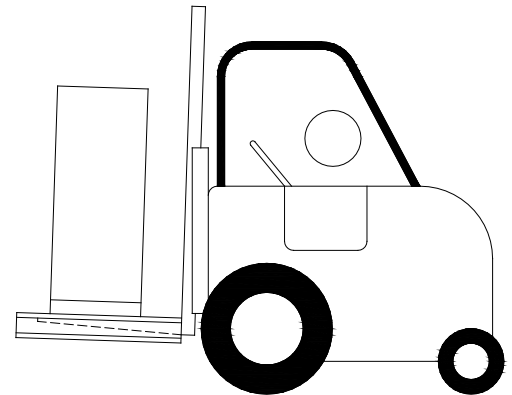

Follow these guidelines when lifting crane or hoist:

- Always lift and carry the machine with the lifting holes provided at the top of the machine.
- Use lift equipment such as straps, chains, capable of lifting 1.5 to 2 times the weight of the machine.
- Take proper precautions for handling and lifting.
- Check if the load is properly balanced by lifting it an inch or two.
- Lift the machine, avoiding sudden accelerations or quick changes of direction.
- Locate the machine where it is to be installed, and lower slowly until it touches the floor.



INSTALLATION

IMPORTANT:

Consider the following when looking for a suitable location to place the machine:

- Overall weight of the machine.
- Weight of material being processed.
- Sizes of material to be processed through the machine.
- Space needed for auxiliary stands, work tables, or other machinery.
- Clearance from walls and other obstacles.
- Maintain an adequate working area around the machine for safety.
- Have the work area well illuminated with proper lighting.
- Keep the floor free of oil and make sure it is not slippery.
- Remove scrap and waste materials regularly, and make sure the work area is free from obstructing objects.
- If long lengths of material are to be fed into the machine, make sure that they will not extend into any aisles.
- **LEVELING:** The machine should be sited on a level, concrete floor. Provisions for securing it should be in position prior to placing the machine. The accuracy of any machine depends on the precise placement of it to the mounting surface.
- **FLOOR:** This tool distributes a large amount of weight over a small area. Make certain that the floor is capable of supporting the weight of the machine, work stock, and the operator. The floor should also be a level surface. If the unit wobbles or rocks once in place, be sure to eliminate by using shims.
- **WORKING CLEARANCES:** Take into consideration the size of the material to be processed. Make sure that you allow enough space for you to operate the machine freely.
- **POWER SUPPLY PLACEMENT:** The power supply should be located close enough to the machine so that the power cord is not in an area where it would cause a tripping hazard. Be sure to observe all electrical codes if installing new circuits and/or outlets.



ELECTRICAL



CAUTION: HAVE ELECTRICAL UTILITIES CONNECTED TO MACHINE BY A CERTIFIED ELECTRICIAN!

Check if the available power supply is the same as listed on the machine nameplate.



WARNING: Make sure the grounding wire (green) is properly connected to avoid electric shock. DO NOT switch the position of the green grounding wire if any electrical plug wires are switched during hookup.

Power Specifications

Your tool is wired for 240 volts, 50Hz alternating current. Before connecting the tool to the power source, make sure the machine is cut off from power source. Before switching on the power, you must check the voltage and frequency of the power to see if they meet with the requirement, the allowed change range for the voltage is $\pm 5\%$, and for the frequency is $\pm 1\%$.

Considerations

- Observe local electrical codes when connecting the machine.
- The circuit should be protected with a time delay fuse or circuit breaker with a amperage rating slightly higher than the full load current of machine.
- A separate electrical circuit should be used for your tools. Before connecting the motor to the power line, make sure the switch is in the "OFF" position and be sure that the electric current is of the same characteristics as indicated on the tool.
- All line connections should make good contact. Running on low voltage will damage the motor.
- In the event of a malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This tool is equipped with an electric cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into a matching outlet that is properly installed and grounded in accordance with all local codes and ordinances.



WARNING: In all cases, make certain the receptacle in question is properly grounded. If you are not sure, have a qualified electrician check the receptacle.



- Improper connection of the equipment-grounding conductor can result in risk of electric shock. The conductor with insulation having an outer surface that is green with or without yellow stripes is the equipment-grounding conductor. If repair or replacement of the electric cord or plug is necessary, do not connect the equipment-grounding conductor to a live terminal.
- Check with a qualified electrician or service personnel if the grounding instructions are not completely understood, or if in doubt as to whether the tool is properly grounded.
- Repair or replace damaged or worn cord immediately.

Extension Cord Safety

Extension cord should be in good condition and meet the minimum wire gauge requirements listed below:

AMP RATING	LENGTH		
	25ft	50ft	100ft
1-12	16	16	14
13-16	14	12	12
17-20	12	12	10
21-30	10	10	No
WIRE GAUGE			

An undersized cord decreases line voltage, causing loss of power and overheating. All cords should use a ground wire and plug pin. Replace any damaged cords immediately.

Power cord connection:

1. Turn the main disconnect switch on the control panel to the OFF position.
2. Unwrap the power cord and route the cord away from the machine toward the power supply.
 - a. Route the power cord so that it will NOT become entangled in the machine in any way.
 - b. Route the cord to the power supply in a way that does NOT create a trip hazard.
3. Connect the power cord to the power supply and check that the power cord has not been damaged during installation.
4. When the machine is clear of any obstruction. The main power switch may be turn ON to test the operation. Turn the switch OFF when the machine is not in operation.




GENERAL BEAD ROLLING

The primary purpose is to “roll form” into sheet metal, primarily “Beads”. A multitude of tools are available for just about any profile you can think of. Bead rolling is both functional and artistic. The functional portion of this operation will add strength and rigidity to sheet material. The artistic portion will add aesthetic appeal to the design. Both operations require practice and experience to perfect. When safety and machine capacity are taken into account, the remaining is open to the imagination and creativity of the metal worker.

- Never exceed the machines capacity. Keeping in mind items like seams and hems increase the material thickness which may exceed the machines capacity.
- Never handle material larger than you are able to comfortably control. Keep in mind that when the material is being rolled, the forces of the rolls will cause the material to move and twist. Use additional equipment such as back gauges, tables, and additional persons to support and secure materials as needed.
- Take several passes. Most beads will require several passes to obtain the desired depth. Planning and practice will assist with this. Practice on similar material to become familiar with how the material will react and to predict the number of passes and the depth of each pass.

ROLLER INSTALLATION AND REMOVAL

1. Use the quick release lever (A) to open the roll gap enough for the rolls to clear each other.
2. Loosen the retaining bolt (B) enough to remove the slotted washer.
3. Remove the rolls.
4. Select and install the die set required for the desired bead type. Either roller can be top or bottom depending on your application.
5. Install the slotted washer and secure with the retaining bolts.
6. The adjustable upper shaft makes it very easy to align tools perfectly, as well as setting tool gaps between step dies.

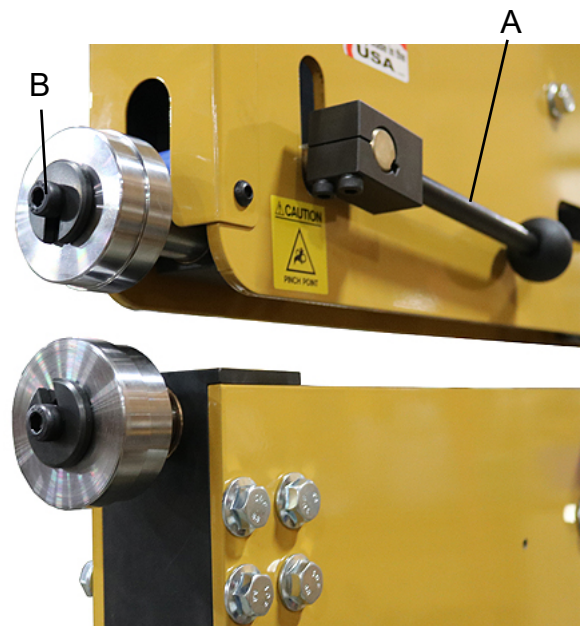



OPERATION

⚠ CAUTION: Always wear proper eye protection with side shields, safety footwear, and leather gloves to protect from burrs and sharp edges.

⚠ CAUTION: Keep hands and fingers clear of the rolling dies. Be aware of how the material moves as it is being formed. Normally the operator should stand in front of the bead roller to avoid getting hit with the material as it is being formed. When handling large heavy materials make sure they are properly supported.

Controls

- The main electrical box houses the majority of the electronics which controls the machine.
- To power machine, plug into a standard 220V wall outlet.
- Activate the power toggle switch to the "ON" position. It takes approx. 20-30 seconds before the motor drive is ready to run.
- The control panel has a speed pot control and a selector for FWD/STOP/REV direction. Forward will feed material from right to left. Reverse will feed material from left to right.
- Select a direction of rotation.
- The bottom roll will begin to rotate as the foot pedal is depressed and will gradually increase rotational speed until it reaches the maximum speed set on the potentiometer.



Rolling

1. Unplug the power cord whenever changing dies.
2. To operate the machine, a set of tooling needs to be selected and installed. Either roller can be on top or bottom depending on your application.
3. With a set of tooling installed, the tool gap can be set with the top hand wheel (A). Clockwise (cw) is down, counterclockwise (ccw) is up.



4. Set the back gauge as desired to assist in positioning the material between the dies. This also assists in repeatability.
5. The quick release (B) is very handy because it will always return to the same depth setting.
6. When the material is positioned as desired, closed the quick release handle to close the gap between the rolls to start to impress the rolls into the material. This step may require some experimentation to get the proper depth so it is recommended that you use a scrap piece of the same material you want to bead roll.



Note: Most beading operations will need to be done in several steps, increasing the depth on each pass. Trying to bead too deep will flex the machine, so take your time with multiple passes.



- Do not start with the rolls completely closed as you may find that the rolls are too close together and find it difficult to feed the material.
7. Place the Forward/Reverse switch in the desired position based upon direction of feed. Forward will feed material from right to left. Reverse will feed material from left to right.
 8. Step down on the foot pedal while feeding the work-piece through the die set. Check the work-piece. It may be necessary to fine tune the adjustment to the depth of the bead to reach the desired bead depth.
 9. When doing beads, you can feed the panel from one end to the other, increase pressure, and switch the machine to reverse, to back it up.
 10. When the material has been fed through the rolls for one pass, release the foot pedal and then, either remove the material if the bead is complete, or toggle the switch to the opposite directions and feed the material back in the opposite direction increasing the pressure on the rolls.
 11. This may be repeated until the desired bead is achieved.



Offsetting the Rolls

The top shaft and roll assembly has the ability to be offset from the bottom roll from $-.375"$ (9.5mm) to $+2.125"$ (54mm). This will allow the rolls to offset to allow for material thickness in rolls like step rolls, or offset to allow for experimentation with various end results based upon the rolls being in different positions relative to the lower roll.

1. Loosen the lock lever (A) to allow the top shaft to be slide inward (top picture) or outward (lower picture) until the desired alignment is achieved.
2. Hold the shaft in position and tighten the lock lever (A).



Note: Test. Test the rolls on a scrap piece of the same material as the project will be completed on to become familiar with the finished result. Bead rolling is an artistic process which can be repeated, but not easily calculated without practice.






Support Tray

1. When not in use, the support tray may be stored in the slot (A) located in the upper back corner of the frame.

It may be installed into the storage slot from either side.



2. Loosen the lock lever and insert the mounting bar into the lower bearing block while guiding the support plate over and around rolls.
3. Align the opening in the support plate over the rolls. This is typically to be centered. Do not allow the rolls to rub on the support plate.
4. Tighten the lock lever to hold the support tray in position.

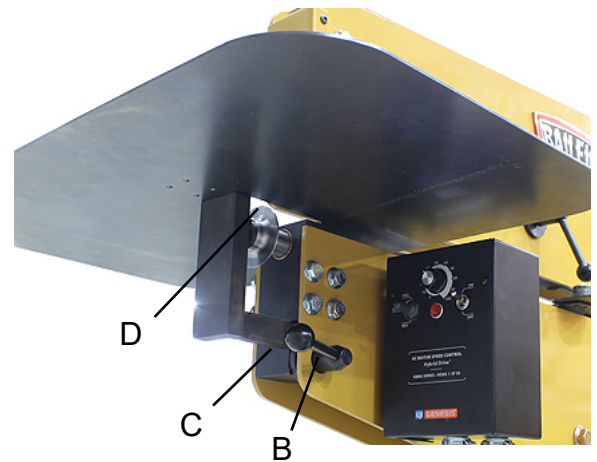



MATERIAL SELECTION

⚠ CAUTION: It must be determined by the customer that materials being processed through the machine are **NOT** potentially hazardous to operator or personnel working nearby.

When selecting materials keep these instructions in mind:

- Material must be clean and dry. (without oil)
- Material should have a smooth surface so it processes easily.
- Dimensional properties of material must be consistent and not exceed the machine capacity values.
- Chemical structure of material must be consistent.
- Buy certificated steel from the same vendor when possible.

UNDERSTANDING SPRINGBACK

Springback, also known as elastic recovery, is the result of the metal wanting to return to its original shape after undergoing compression and stretch. After the bending leaf is removed from the metal and the load is released, the piece part relaxes, forcing the bent portion of the metal to return slightly to its original shape. The key to obtaining the correct bend angle is to over bend the metal a little and allow it to spring back to the desired angle. All metals exhibit a certain amount of spring back.



LUBRICATION AND MAINTENANCE



WARNING: Make sure the electrical disconnect is OFF before working on the machine.

Maintenance should be performed on a regular basis by qualified personnel.

Always follow proper safety precautions when working on or around any machinery.



***Note:** Proper maintenance can increase the life expectancy of your machine.*

- Check daily for any unsafe conditions and fix immediately.
- Check that all nuts and bolts are properly tightened.
- On a weekly basis clean the machine and the area around it.
- Lubricate threaded components and sliding devices.
- Apply rust inhibitive lubricant to all non-painted surfaces.
- The adjusting block should be greased.
- Oil the shaft around the bronze bushing monthly with a drop or two of a 30 to 40 weight oil.
- The gearbox is oiled for life and does not require service.



OPTIONAL TOOLING AVAILABLE


Part Number	Description
BR18E - .090" STEP ROLL	.090" Step Roll Set
BR18E - .090" STEP ROLL-NYLON	Nylon .090" Step Roll Set
BR18E - 1" FLAT BEAD	1" Flat Bead Roll Set
BR18E - 1" FLAT BEAD-NYLON	Nylon 1" Flat Bead Roll Set
BR18E - 1" ROUND BEAD	1" Round Bead Roll Set
BR18E - 1" ROUND BEAD-NYLON	Nylon 1" Round Bead Roll Set
BR18E - 1-1/4" SPOILER ROLL	1-1/4" Spoiler Roll Set
BR18E - 1-1/4" SPOILER ROLL-NY	Nylon 1-1/4" Spoiler Roll Set
BR18E - 1/16" STEP ROLL	1/16" Step Roll Set
BR18E - 1/16" STEP ROLL-NYLON	Nylon 1/16" Step Roll Set
BR18E - 1/2" FLAT BEAD	1/2" Flat Bead Roll Set
BR18E - 1/2" FLAT BEAD-NYLON	Nylon 1/2" Flat Bead Roll Set
BR18E - 1/2" ROUND BEAD	1/2" Round Bead Roll Set
BR18E - 1/2" ROUND BEAD-NYLON	Nylon 1/2" Round Bead Roll Set
BR18E - 1/4" FLAT BEAD	1/4" Flat Bead Roll Set
BR18E - 1/4" FLAT BEAD-NYLON	Nylon 1/4" Flat Bead Roll Set
BR18E - 1/4" ROUND BEAD	1/4" Round Bead Roll Set
BR18E - 1/4" ROUND BEAD-NYLON	Nylon 1/4" Round Bead Roll Set
BR18E - 1/4" STEP ROLL	1/4" Step Roll Set
BR18E - 1/4" STEP ROLL-NYLON	Nylon 1/4" Step Roll Set
BR18E - 1/8" FLAT BEAD	1/8" Flat Bead Roll Set
BR18E - 1/8" FLAT BEAD-NYLON	Nylon 1/8" Flat Bead Roll Set
BR18E - 1/8" ROUND BEAD	1/8" Round Bead Roll Set
BR18E - 1/8" ROUND BEAD-NYLON	Nylon 1/8" Round Bead Roll Set
BR18E - 1/8" STEP ROLL	1/8" Step Roll Set
BR18E - 1/8" STEP ROLL-NYLON	Nylon 1/8" Step Roll Set
BR18E - 3/16" FLAT BEAD	3/16" Flat Bead Roll Set
BR18E - 3/16" FLAT BEAD-NYLON	Nylon 3/16" Flat Bead Roll Set
BR18E - 3/16" ROUND BEAD	3/16" Round Bead Roll Set
BR18E - 3/16" ROUND BEAD-NYLON	Nylon 3/16" Round Bead Roll Set
BR18E - 3/16" STEP ROLL	3/16" Step Roll Set
BR18E - 3/16" STEP ROLL-NYLON	Nylon 3/16" Step Roll Set
BR18E - 3/32" STEP ROLL	3/32 Step Roll Set



Part Number	Description
BR18E - 3/32" STEP ROLL NYLON	Nylon 3/32" Step Roll Set
BR18E - 3/4" FLAT BEAD	3/4" Flat Bead Roll Set
BR18E - 3/4" FLAT BEAD-NYLON	Nylon 3/4" Flat Bead Roll Set
BR18E - 3/4" ROUND BEAD	3/4" Round Bead Roll Set
BR18E - 3/4" ROUND BEAD-NYLON	Nylon 3/4" Round Bead Roll Set
BR18E - 3/8" FLAT BEAD	3/8" Flat Bead Roll Set
BR18E - 3/8" FLAT BEAD-NYLON	Nylon 3/8" Flat Bead Roll Set
BR18E - 3/8" ROUND BEAD	3/8" Round Bead Roll Set
BR18E - 3/8" ROUND BEAD-NYLON	Nylon 3/8" Round Bead Roll Set
BR18E - 45 DEGREE STEP ROLL	45 Degree Step Roll Set
BR18E - 45 DEGREE STEP ROLL-NY	Nylon 45 Degree Step Roll Set
BR18E - 5/16" FLAT BEAD	5/16" Flat Bead Roll Set
BR18E - 5/16" FLAT BEAD-NYLON	Nylon 5/16" Flat Bead Roll Set
BR18E - 5/16" ROUND BEAD	5/16" Round Bead Roll Set
BR18E - 5/16" ROUND BEAD-NYLON	Nylon 5/16" Round Bead Roll Set
BR18E - 5/8" ROUND BEAD	5/8" Round Bead Roll Set
BR18E - 5/8" ROUND BEAD-NYLON	Nylon 5/8" Round Bead Roll Set
BR18E - ART ROLL	Thin Bead Art Roll (One Roll)
BR18E - ART SET	Thin Bead Art Roll Set (Set of Two Dies)
BR18E - HEM ROLL #1	Hem Roll Set #1 (Set of Two Dies)
BR18E - HEM ROLL #2	Hem Roll Set #2 (Set of Two Dies)
BR18E - HEM ROLL #3	Hem Roll Set #3 (Set of Two Dies)
BR18E - SHEAR SET	Rotary Shear Set (Set of Two Dies)
BR18E - SOLID GROOVE ROLL	Plastic Solid Groove Roll (One Roll)
BR18E - SOLID ROLL	Plastic Solid Roll (One Roll)
BR18E - TIPPING ROLL	Tipping Roll Set (Set of Two Dies)
BR18E - TUBE BEAD	Heavy Duty Tube Bead Set (Set of Two Dies)
BR18E - UNIVERSAL GROOVE ROLL	Plastic Universal Groove Roll (One Roll)
BR18E - Z ROLL	"Z" Soft Step Roll Set (Set of Two Dies)




FRAME ASSEMBLY

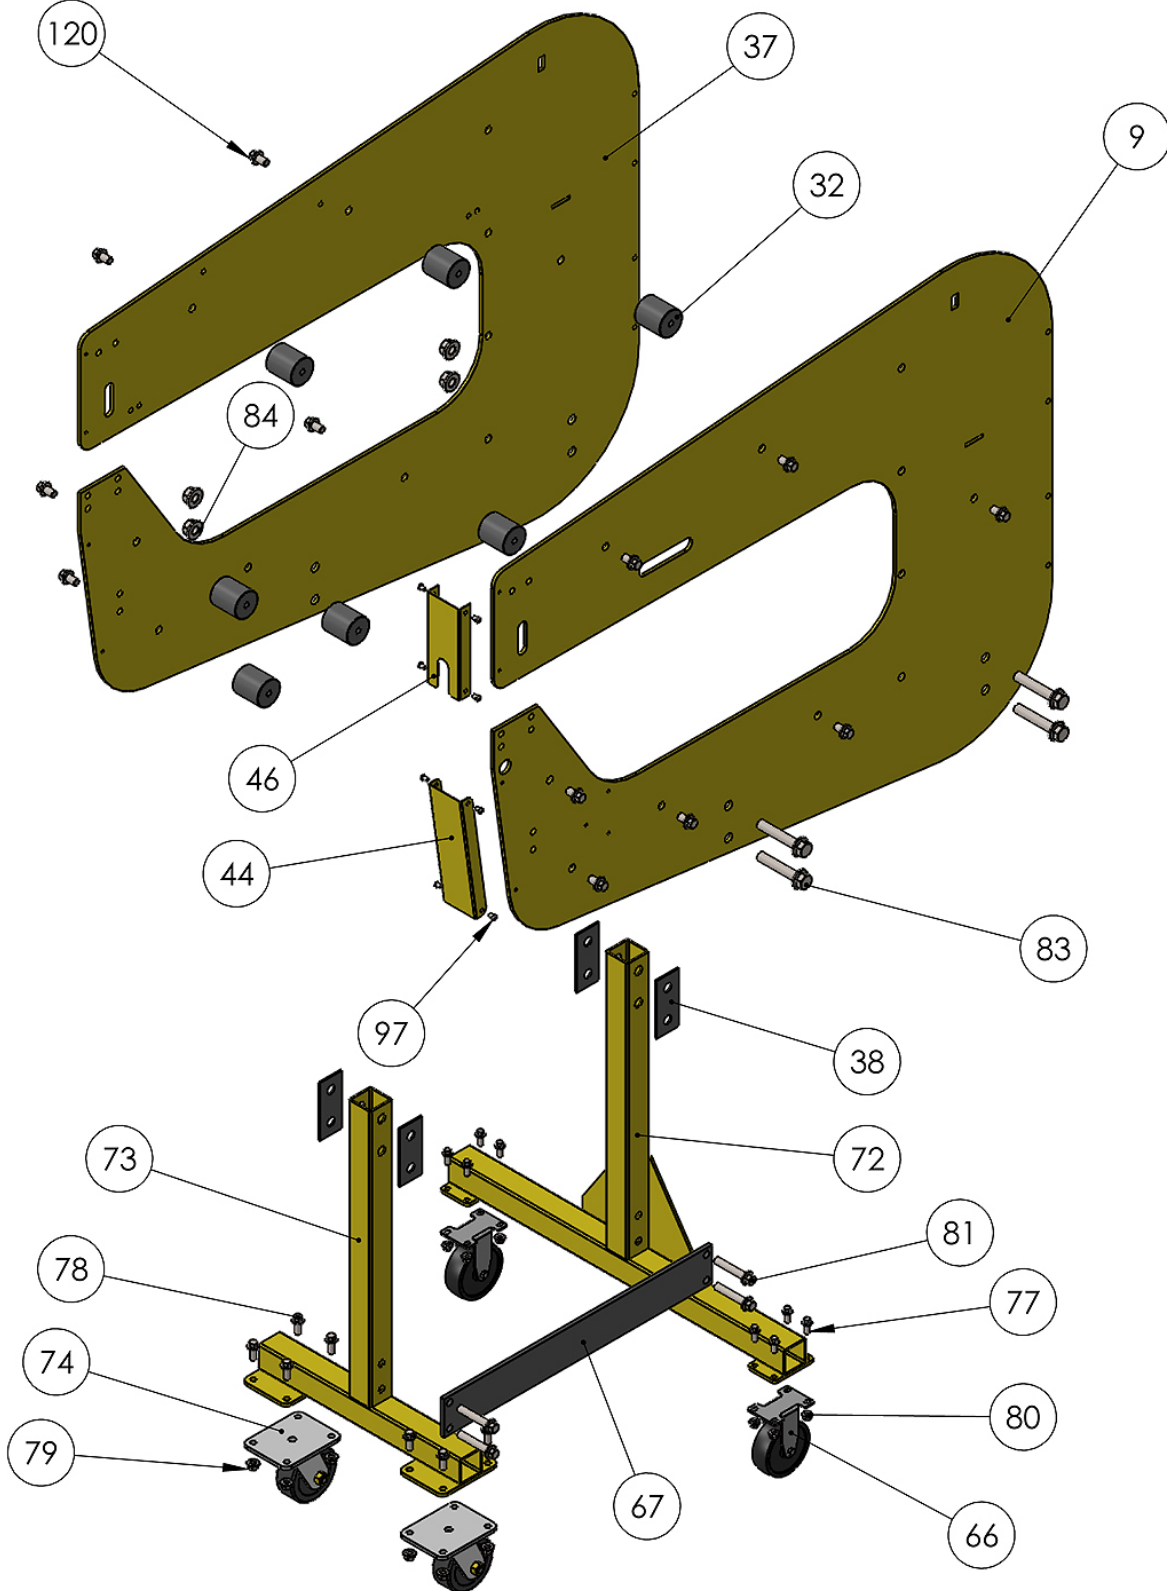




SHAFT HOUSING ASSEMBLY

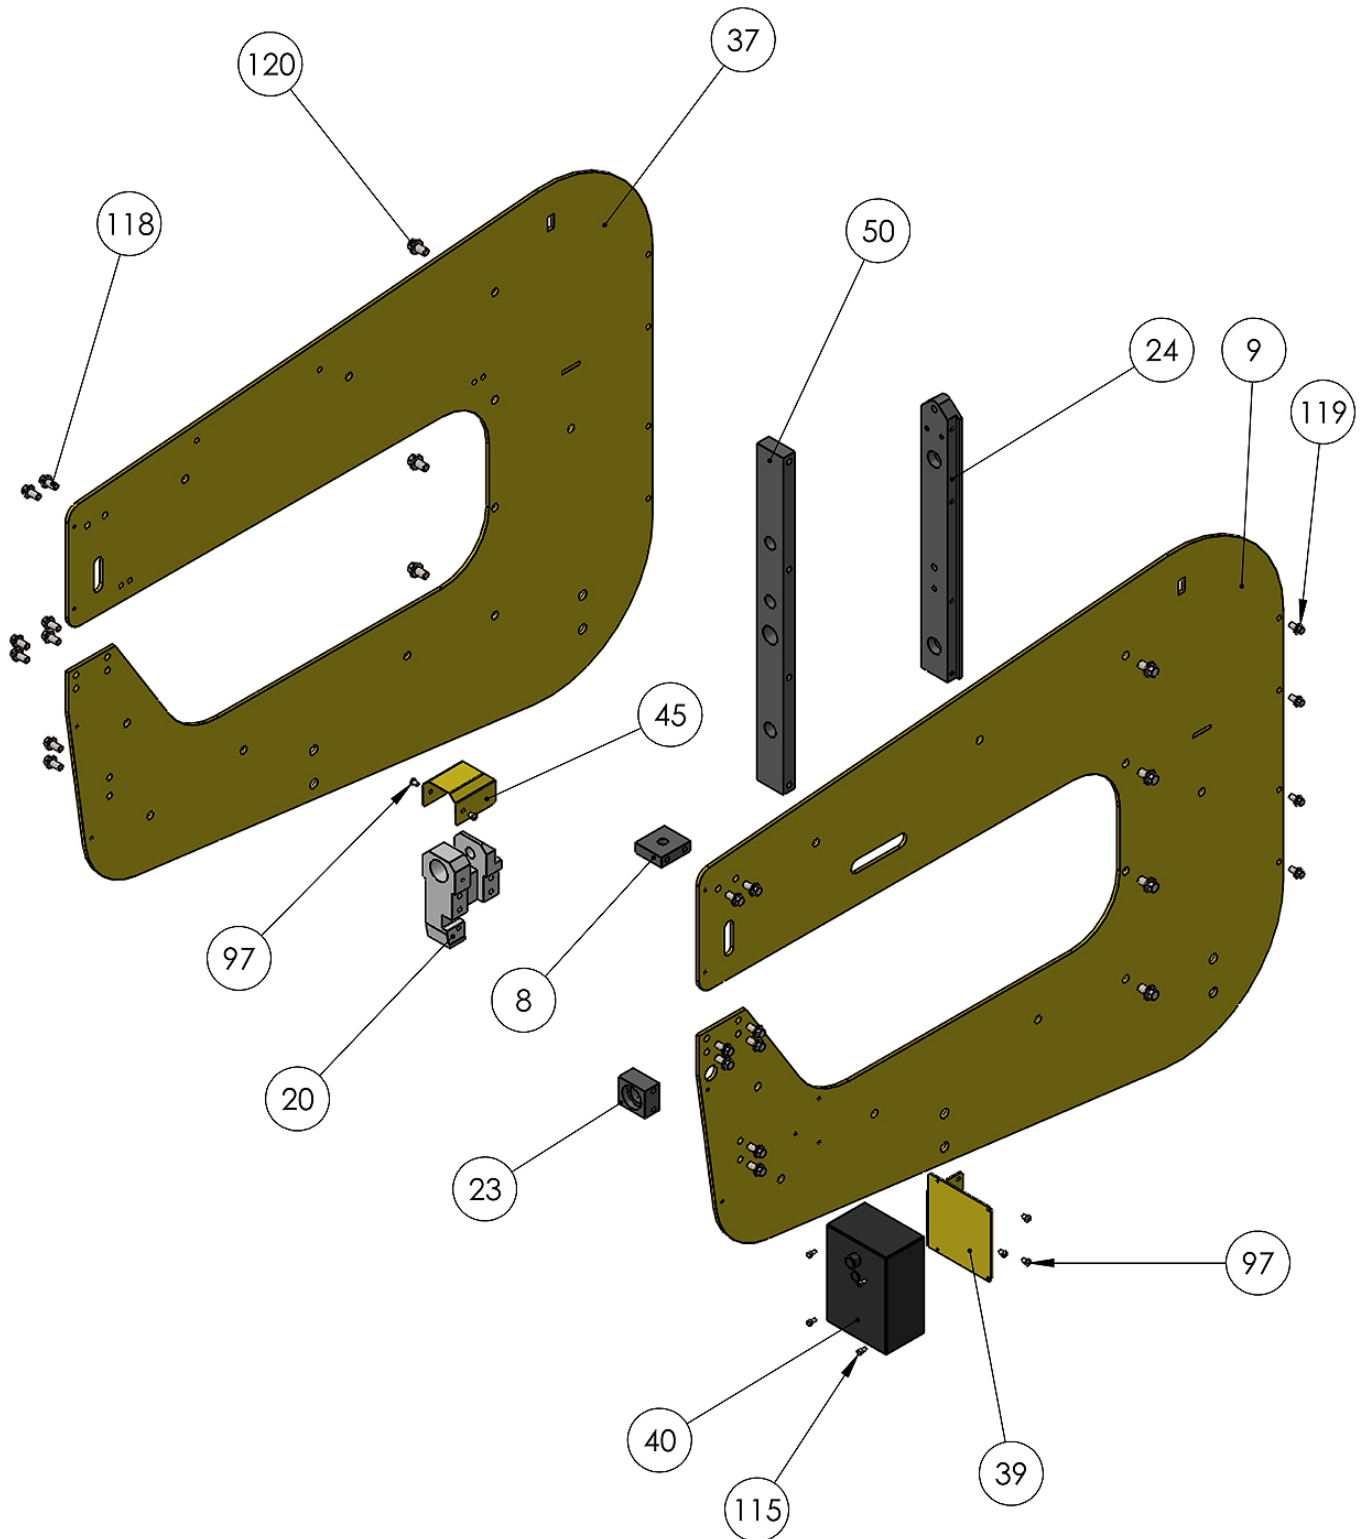






CAM HOUSING ASSEMBLY

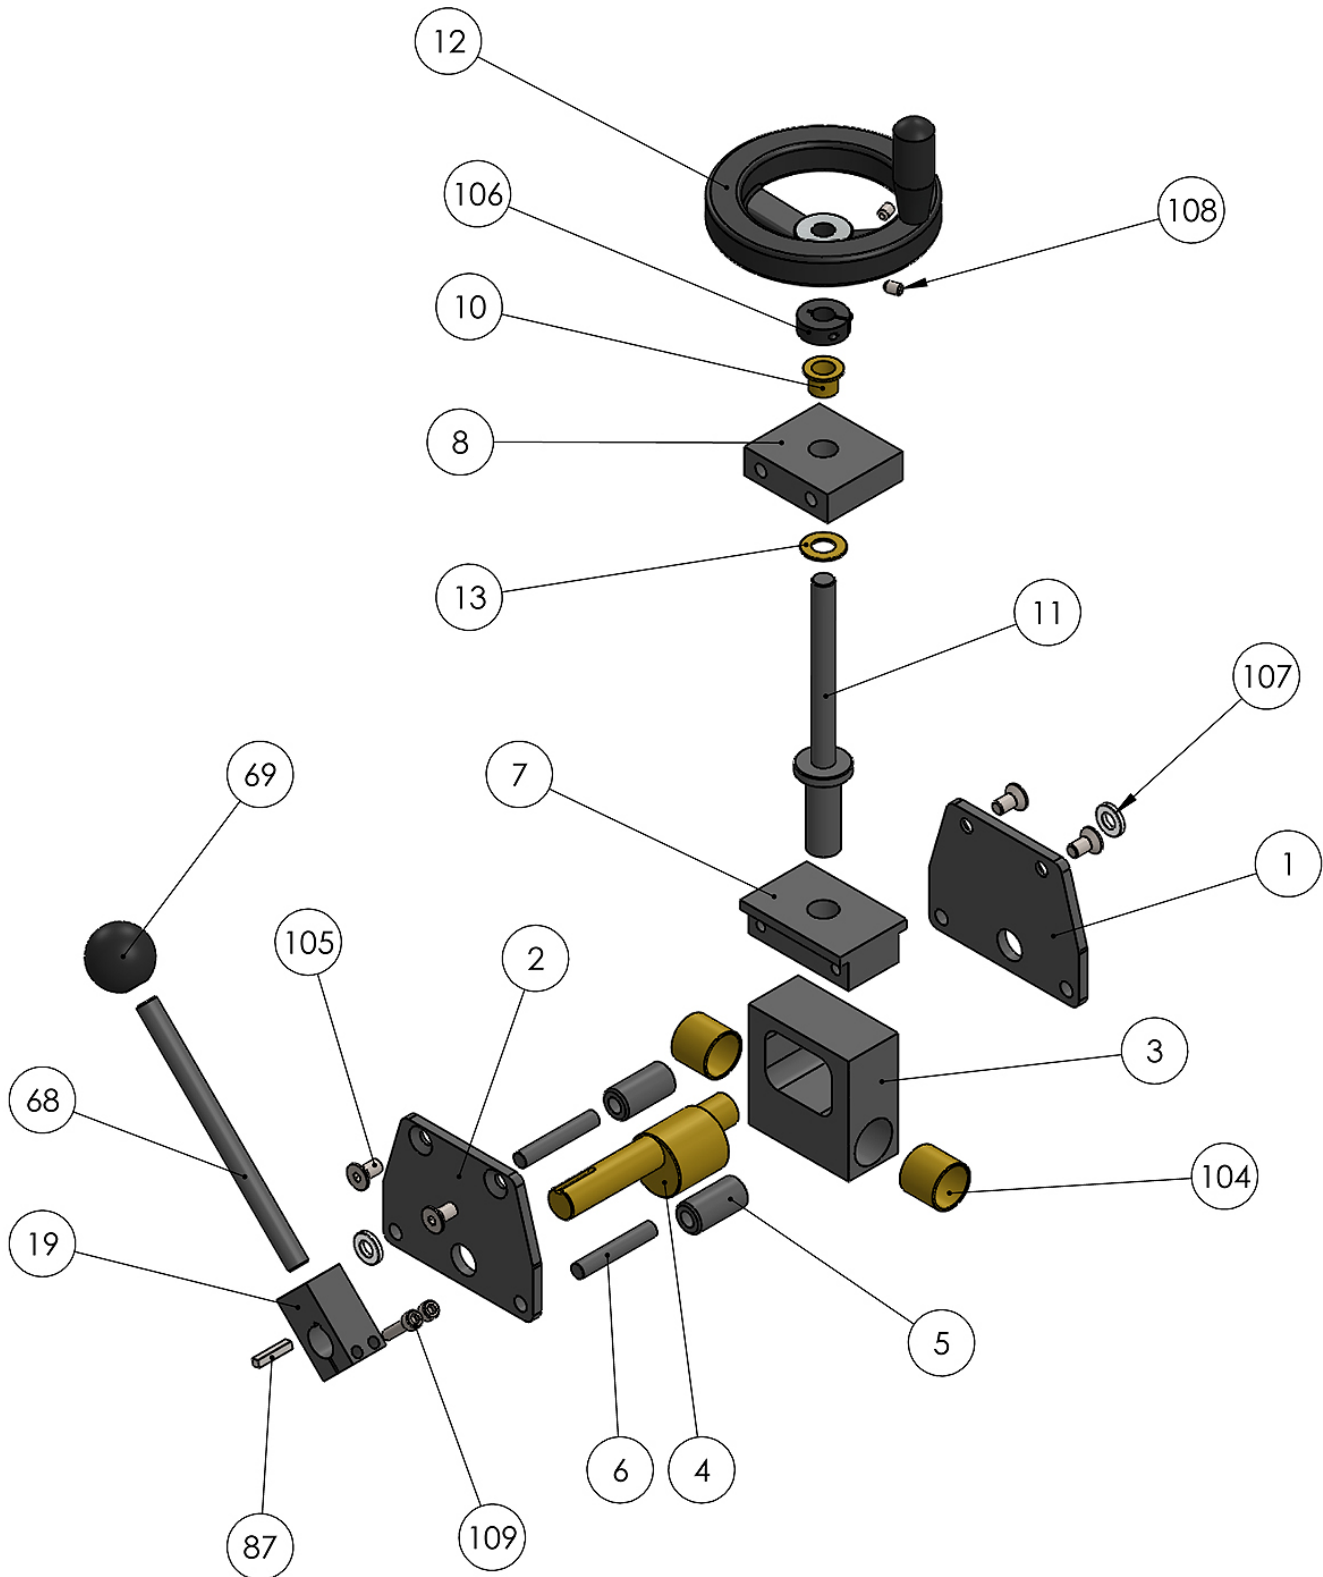




INTERMEDIATE SHAFT ASSEMBLY

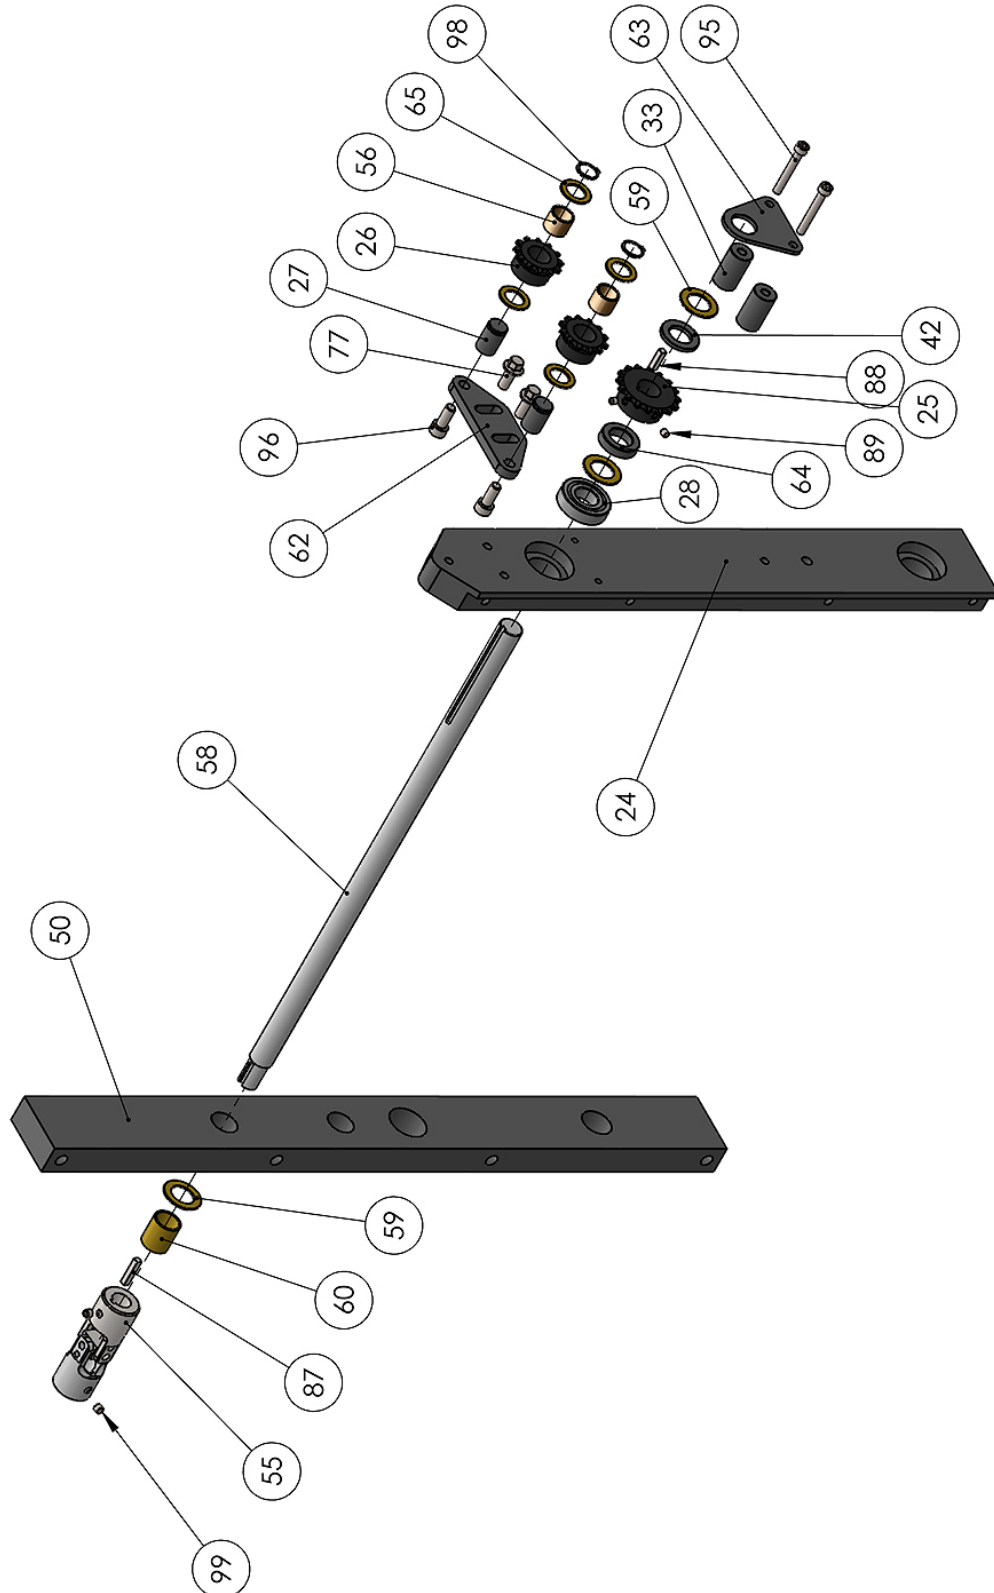




TOP SHAFT ASSEMBLY

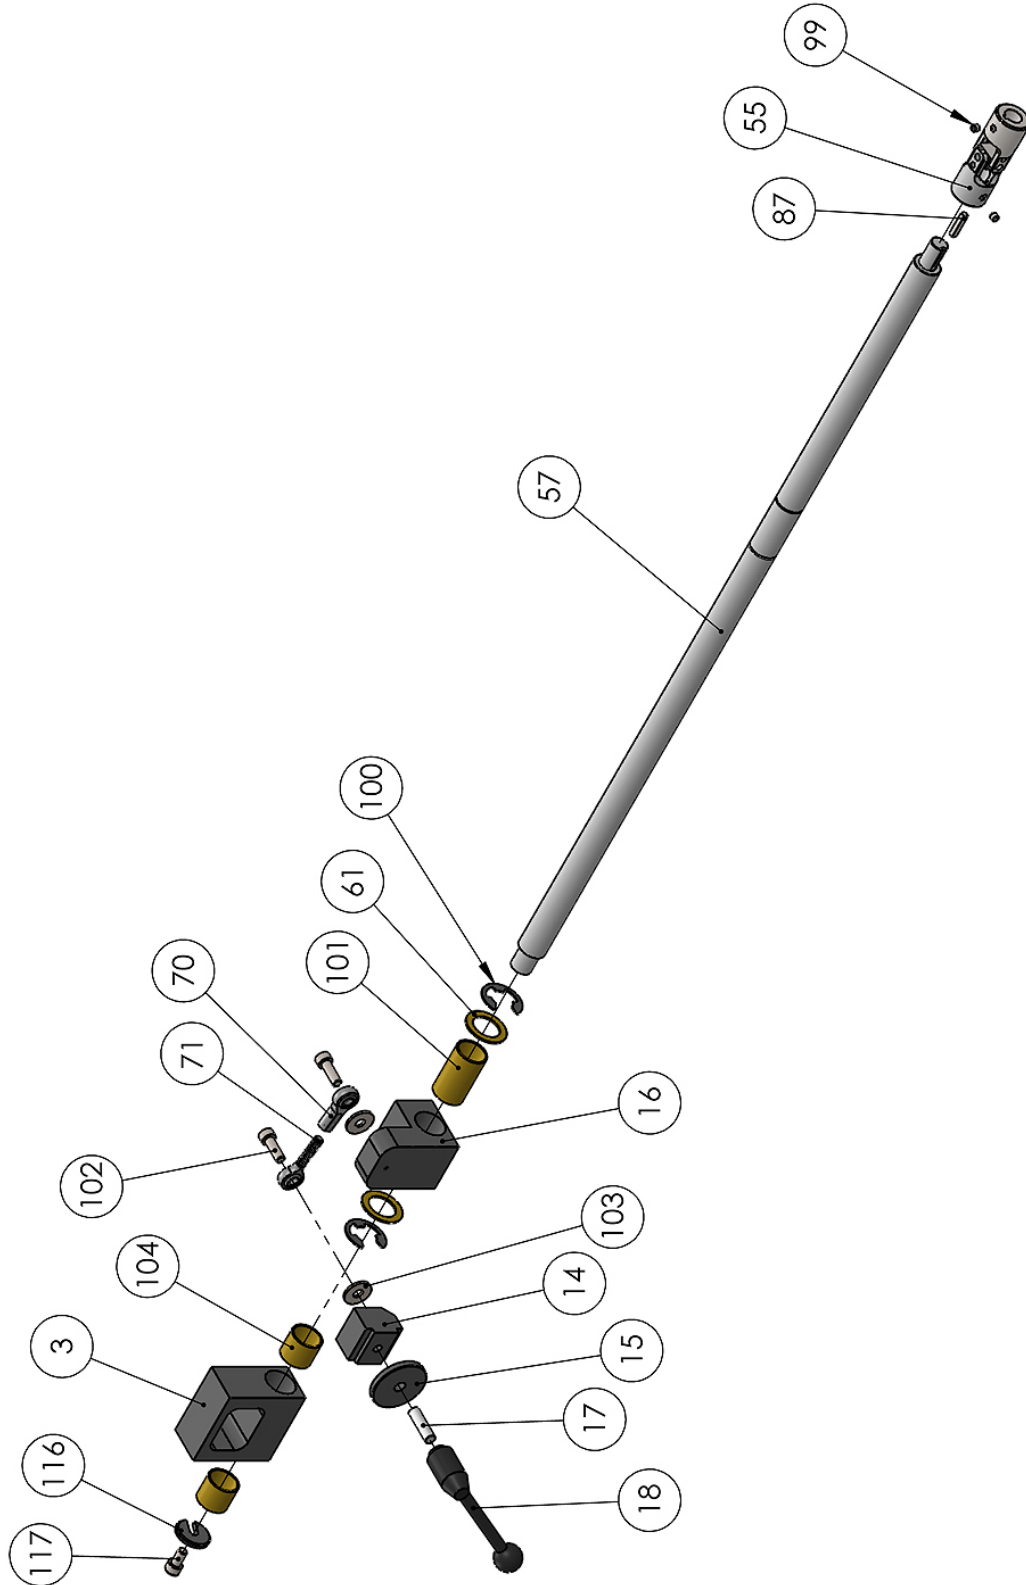




BEARING BLOCK ASSEMBLY

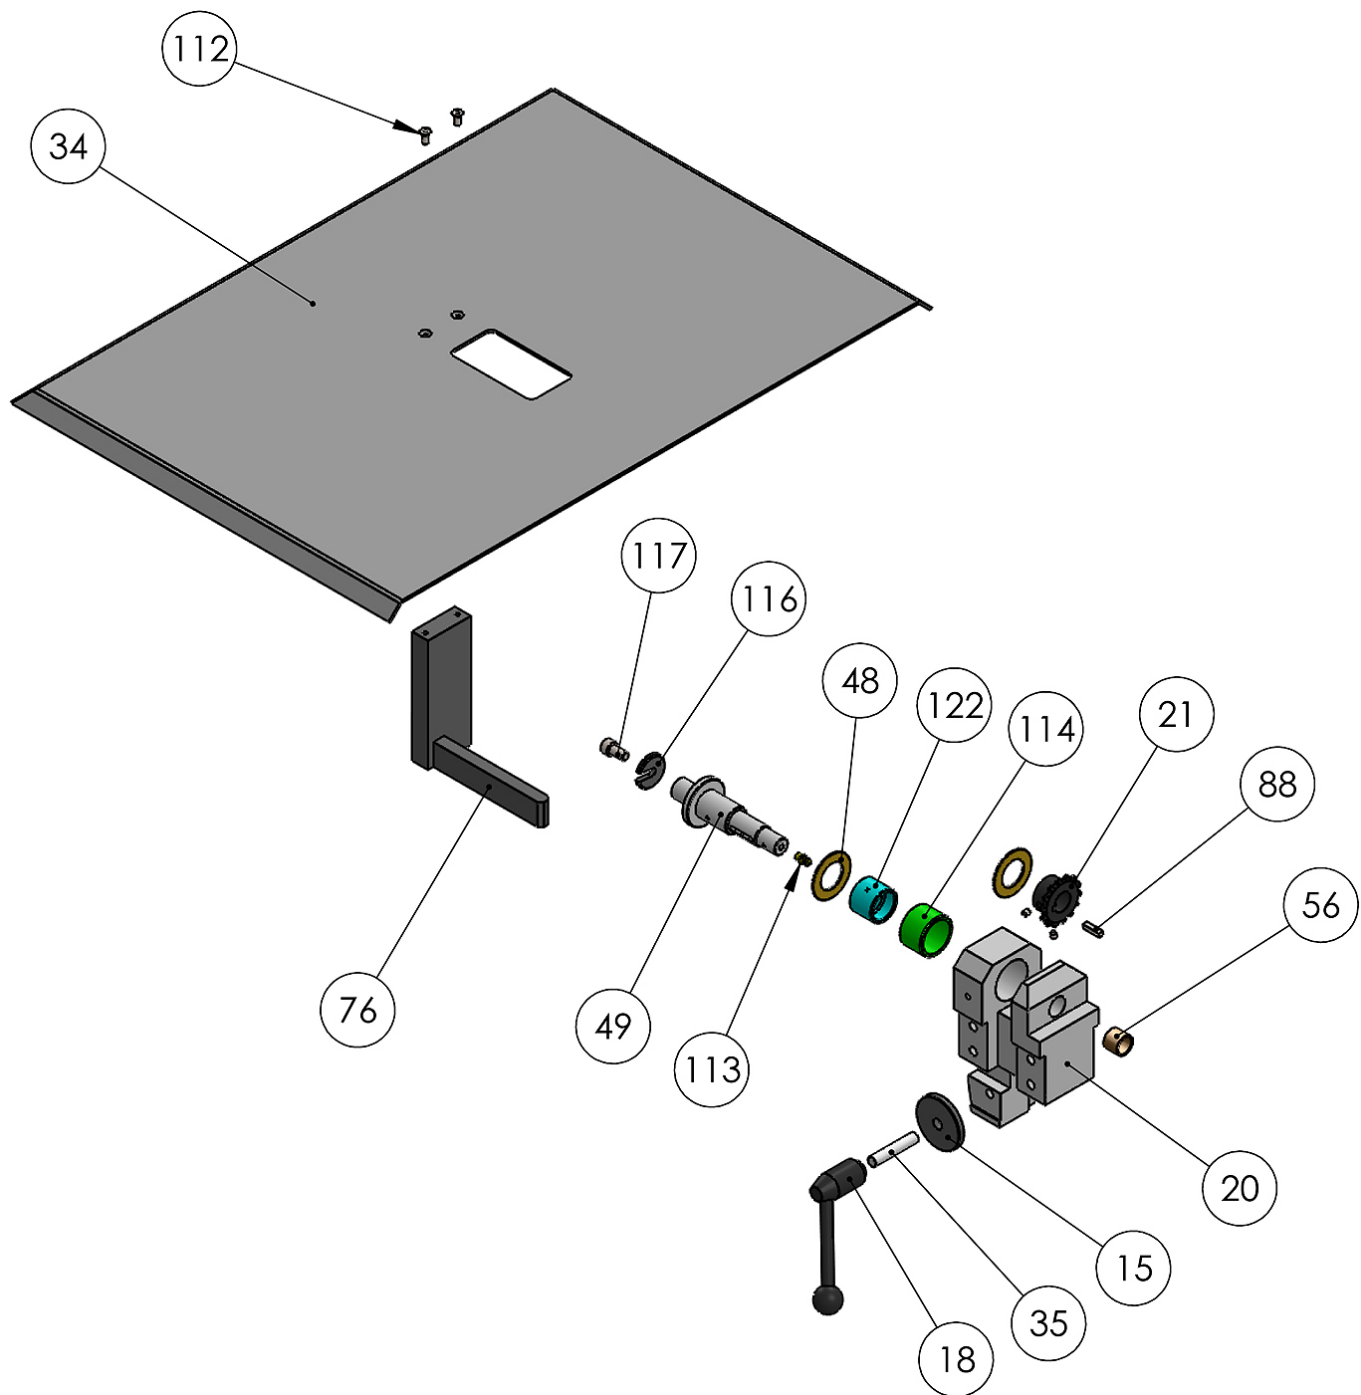



FENCE ASSEMBLY

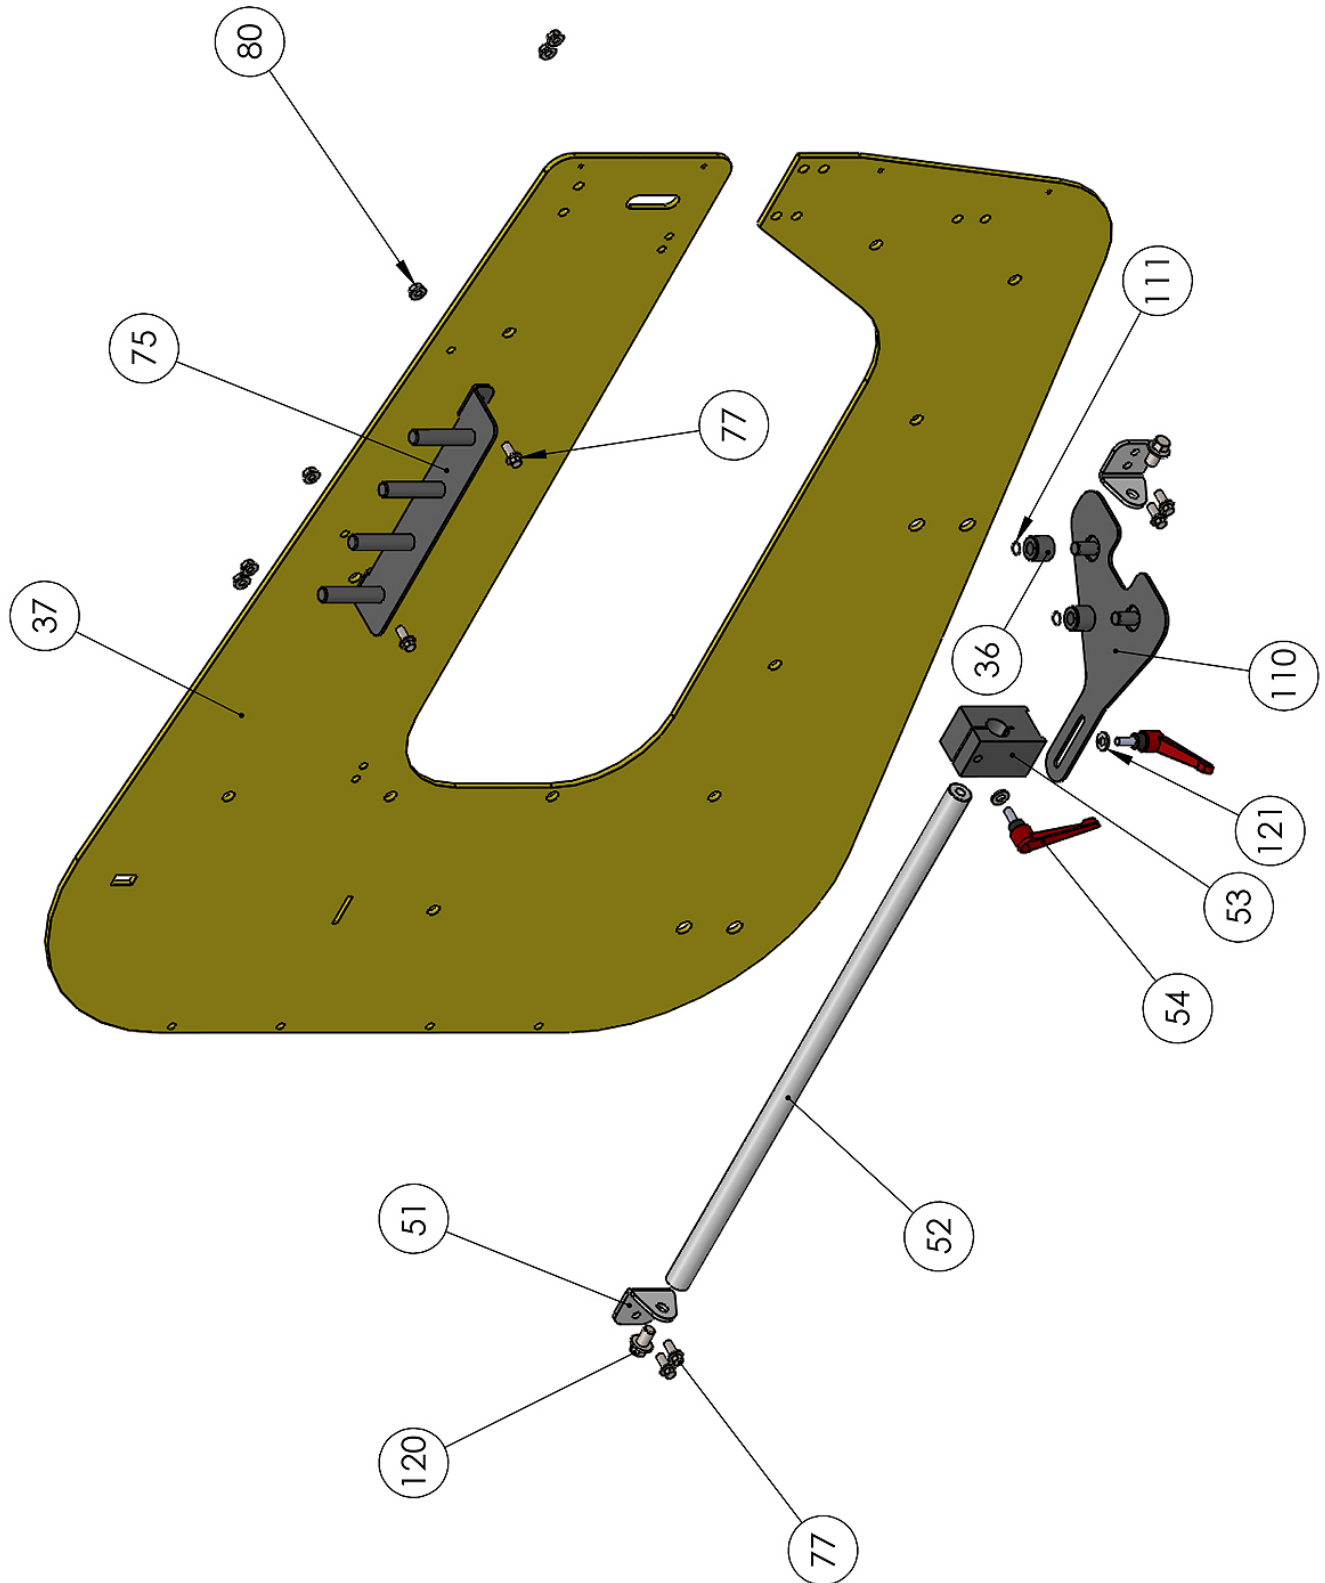



Parts List

Item	Part Number	Description	Qty.
1	BR16-6A006	LH Cam Housing Side Frame	1
2	BR16-6A007	RH Cam Housing Side Frame	1
3	BR16-6A008	Cam Housing	1
4	BR16-7A003	Cam	1
5	BR16-7A008	Guide Roller	2
6	BR16-7A014	Roller Shaft	2
7	BR16-6A005	Cam Housing Block	1
8	BR16-6A003	Adjustment Block	1
9	BR16-6A001-V2	Rh Side Frame	1
10	PP-0196	0.5 ID x 0.625 OD x 0.562 LG	1
11	BR16-5A006	Front Adjustment Screw	1
12	PP-1033	5.0 Handwheel	1
13	PP-0055	0.5 ID x 1.0 OD x .0625 THK	1
14	BR16-6A047	Slide Clamp	1
15	BR16-7A028	Washer	2
16	BR16-6A029	Slide Block	1
17	BS-0352	.375-16 x 1.375	1
18	PP-0602	Release Handle	2
19	BR16-6A004-V2	Cam Block	1
20	BR16-6A022	Lower Bearing Block	1
21	PP-1714	#35 14T Sprocket	2
22	BR16-7A010	Lower Drive Shaft	1
23	BR16-6A050	Bushing Block	1
24	BR16-6A014-V2	Drive Plate	1
25	PP-1171	16T #35 .75" Bore Sprocket	2
26	PP-1715	#35 12T Sprocket	2
27	BR16-7A009	Idler Stud	2
28	PP-1718	.75 ID x 1.625 OD Bearing	3
29	PP-1719	60:1 Gearbox	1
30	PP-1229	1/2Hp 3 Phase Motor	1
31	BR16-7A007	Gearbox Spacer	1
32	BR16-7A011	Plate Spacer	7
33	BR16-7A004	Cap Spacer	2



Item	Part Number	Description	Qty.
34	BR16-6A038	Table	1
35	BS-0283	.375-16 x 2.0 Stud	1
36	BR16-7A017	Roller	2
37	BR16-6A002-V2	RH Side Frame	1
38	BR16-6A033	Stand Spacer	4
39	BR16-6A013	Controller Bracket	1
40	PP-1720	KBMA Controller	1
41	BR16-6A025-V2	Rear Chain Guard	1
42	BR16-7A006	Gear Spacer	1
43	PB24-7A038	Guard Spacer	2
44	BR16-6A019	Lower Front Guard	1
45	BR16-6A045	Upper Sprocket Guard	1
46	BR16-6A044	Upper Front Guard	1
47	BR16-6A049	Torque Bracket	1
48	BR36-7A037	1.0 ID x 1.75 OD x .065 Thrust Washer	2
49	BR16-7A027	Bottom Shaft	1
50	BR16-6A051	Spacer Block	1
51	IDX-6A002-V2	IDX Shaft Mount	2
52	BR16-7A030	Fence Rail	1
53	BR15-6A008	Fence Block	1
54	PP-1527	M8 Handle	2
55	PP-1734	.625 Bore U-Joint	1
56	PP-0997	3/4 OD x 5/8 ID x 5/8 LG Bush	3
57	BR16-7A031	Top Shaft	1
58	BR16-7A032	Drive Shaft	1
59	PP-0101	0.75 ID x 1.25 OD x .0625 THK	4
60	PP-0838	.75 ID x 1.0 OD x 1.0 LNG Bushing	1
61	PP-0935	1.0 ID x 1.5 OD x .0625 THK	2
62	BR16-6A053	Tension Plate	1
63	BR16-6A054	Sprocket Cap	1
64	BR16-7A033	Sprocket Spacer	1
65	PP-0168	.625 ID x 1.0 OD x .0625	4
66	PP-1732	Straight Caster	2
67	BR16-6A059	Stand Brace	1
68	M150-7A013	Quick Release Shaft	1



Item	Part Number	Description	Qty.
69	PP-0133	Black Ball Knob	1
70	PP-1738	.3125-24 Female Rod End	1
71	PP-1737	.3125-24 Male Rod End	1
72	BR16-5A009	Rear Stand	1
73	BR16-5A010	Front Stand	1
74	PP-0048-2	4.0 Inch Caster	2
75	BR16-5A002	Tool Holder	1
76	BR16-5A011	Table Mount	1
77	M8 X 1.25 X 20	Hex Flange	16
78	M10 X 1.5 X 25	Hex Flange	8
79	M10 X 1.5	Flange Nut	8
80	M8 X 1.25	Flange Nut	14
81	M12 X 1.75 X 70	Hex Flange	4
82	M12 X 1.75	Flange Nut	4
83	M16 X 2.0 X 90	Hex Flange	4
84	M16 X 2.0	Flange Nut	4
85	3/8 LOCK WASHER	Std.	4
86	3/8-16 X 1	HHCS	4
87	STD.	.1875 x 1 Key Stock	4
88	STD.	.1875 x 1 Key Stock	4
89	M5 X 0.8 X 6	Set Screw	8
90	PP-1227	0.75 ID x 0.875 OD x 0.75 Wide	1
91	M6 X 1.0 X 20	Hex Flange	2
92	M6 X 1.0	Flanged Nut	2
93	M10 X 1.50 X 70	Hex Flange	1
94	M6 X 1.0 X 30	SHCS	2
95	M6 X 1.0 X 45	SHCS	2
96	M8 X 1.25 X 20	SHCS	2
97	M6 X 1.0 X 10	Button Head	15
98	5/8" EXT. RETAINING RING	Std.	2
99	1/4-20 X .25	Set Screw	2
100	STD.	1.0 E Ring	2
101	PP-1228	1.0 ID x 1.128 OD x 2 LNG Bushing	1
102	M8 X 1.25 X 25	SHCS	2
103	M8 FLATWASHER	Std.	2



Item	Part Number	Description	Qty.
104	PP-1733	1.0 ID x 1.125 OD x 1.0 Bushing	2
105	M8 X 1.25 X 16	FHCS	4
106	PP-0037	1/2" Clamp Collar	1
107	BR16-7A034	Cam Housing Washer	2
108	1/4-20 X 3/8	Set Screw	2
109	M6 X 1.0 X 25	SHCS	2
110	BR15-5A003	Roller Table	1
111	STD.	.5" Ext. Retaining Ring	2
112	M5 X 0.8 X 12	FHCS	2
113	STD.	Straight Grease Zerk	1
114	PP-1141	Needle Bearing	1
115	M5 X 0.8 X 10	SHCS	4
116	BR36-7A038	Retaining Washer	2
117	M8 X 1.25 X 16	SHCS	2
118	M10 X 1.5 X 20	Hex Flange	16
119	M8 X 1.25 X 16	Hex Flange	8
120	M12 X 1.75 X 20	Hex Flange	24
121	M8 FLAT WASHER	Std.	2
122	PP-1173	1.0 ID x 1.25 OD x 1 LNG	1



NOTES



Distributed By



SYDNEY
(02) 9860 9111

MELBOURNE
(03) 9212 4422

BRISBANE
(07) 3715 2200

PERTH
(08) 9373 9999

www.machineryhouse.com.au

WARNING

General Machinery Safety Instructions

Machinery House
requires you to read this entire Manual before using this machine.

- 1. Read the entire Manual before starting machinery.** Machinery may cause serious injury if not correctly used.
- 2. Always use correct hearing protection when operating machinery.** Machinery noise may cause permanent hearing damage.
- 3. Machinery must never be used when tired, or under the influence of drugs or alcohol.** When running machinery you must be alert at all times.
- 4. Wear correct Clothing.** At all times remove all loose clothing, necklaces, rings, jewelry, etc. Long hair must be contained in a hair net. Non-slip protective footwear must be worn.
- 5. Always wear correct respirators around fumes or dust when operating machinery.** Machinery fumes & dust can cause serious respiratory illness. Dust extractors must be used where applicable.
- 6. Always wear correct safety glasses.** When machining you must use the correct eye protection to prevent injuring your eyes.
- 7. Keep work clean and make sure you have good lighting.** Cluttered and dark shadows may cause accidents.
- 8. Personnel must be properly trained or well supervised when operating machinery.** Make sure you have clear and safe understanding of the machine you are operating.
- 9. Keep children and visitors away.** Make sure children and visitors are at a safe distance for you work area.
- 10. Keep your workshop childproof.** Use padlocks, Turn off master power switches and remove start switch keys.
- 11. Never leave machine unattended.** Turn power off and wait till machine has come to a complete stop before leaving the machine unattended.
- 12. Make a safe working environment.** Do not use machine in a damp, wet area, or where flammable or noxious fumes may exist.
- 13. Disconnect main power before service machine.** Make sure power switch is in the off position before re-connecting.
- 14. Use correct amperage extension cords.** Undersized extension cords overheat and lose power. Replace extension cords if they become damaged.
- 15. Keep machine well maintained.** Keep blades sharp and clean for best and safest performance. Follow instructions when lubricating and changing accessories.
- 16. Keep machine well guarded.** Make sure guards on machine are in place and are all working correctly.
- 17. Do not overreach.** Keep proper footing and balance at all times.
- 18. Secure workpiece.** Use clamps or a vice to hold the workpiece where practical. Keeping the workpiece secure will free up your hand to operate the machine and will protect hand from injury.
- 19. Check machine over before operating.** Check machine for damaged parts, loose bolts, Keys and wrenches left on machine and any other conditions that may effect the machines operation. Repair and replace damaged parts.
- 20. Use recommended accessories.** Refer to instruction manual or ask correct service officer when using accessories. The use of improper accessories may cause the risk of injury.
- 21. Do not force machinery.** Work at the speed and capacity at which the machine or accessory was designed.
- 22. Use correct lifting practice.** Always use the correct lifting methods when using machinery. Incorrect lifting methods can cause serious injury.
- 23. Lock mobile bases.** Make sure any mobile bases are locked before using machine.
- 24. Allergic reactions.** Certain metal shavings and cutting fluids may cause an allergic reaction in people and animals, especially when cutting as the fumes can be inhaled. Make sure you know what type of metal and cutting fluid you will be exposed to and how to avoid contamination.
- 25. Call for help.** If at any time you experience difficulties, stop the machine and call you nearest branch service department for help.

WARNING

Swage & Jenny Machine Safety Instructions

Machinery House
requires you to read this entire Manual before using this machine.

- 1. Maintenance.** Make sure the Swage & Jenny is turned off and disconnect from the main power supply and make sure all moving parts have come to a complete stop before any inspection, adjustment or maintenance is carried out.
- 2. Swage & Jenny Condition.** A Swage & Jenny must be maintained for a proper working condition. Never operate a Swage & Jenny that has damaged or worn parts. Scheduled routine maintenance should be performed on a scheduled basis.
- 3. Roll Condition.** Never operate a Swage & Jenny with a damaged or badly worn rolls. Replace if required. Rolls should never be greased or lubricated as rolls will slip the material and will not bend.
- 4. Roll Direction.** Be aware of the correct rotational axis of the motor when a qualified electrician connects the Machine.
- 5. Hand Hazard.** Keep hands and fingers clear from moving parts. Serious injury can occur if hand or finger tips get pinched by rolls and can be dragged into machine.
- 6. Personal Protection.** Gloves, safety glasses and safety hat are recommended during operation.
- 7. Avoiding Entanglement.** Swage & Jenny guards must be used at all times. Tie up long hair and use the correct hair nets to avoid any entanglement with the Swage & Jenny moving parts.
- 8. Understand the machines controls.** Make sure you understand the use and operation of all controls.
- 9. Trained Operator.** This machine must be operated by authorized and trained personnel.
- 10. Power outage.** In the event of a power failure during use of the machine, turn off all switches to avoid possible sudden start up once power is restored.
- 11. Work area hazards.** Keep the area around the Swage & Jenny clean from oil, tools, chips. Pay attention to other persons in the area and know what is going on around the area to ensure unintended accidents.
- 12. Guards.** Do not operate Swage & Jenny without the correct guards in place. Necessary guards protect you from injuries by gearbox, motors and other moving gears & parts. The only other area which needs to be carefully monitored during use is the rotational area of the rolls.
- 13. Material condition.** Material must be clean of oil and dry. Oily material can slip and will not bend.
- 14. Material hardness.** Make sure your hardness is the same throughout the material, we recommend that you use certified material. Never bend hard steel, glass or fragile material on this machine.
- 15. Feeding material.** Making a tight bend in one pass is not possible. So you need several passes before you can achieve a certain radius. Tighter curves and full radius always need more passes.
- 16. Stopping the Rolls.** Do not stop or slow the rolls with your hand or workpiece. Allow the Swage & Jenny to stop on its own.
- 17. Emergency stop.** Use the emergency stop button in case of any emergency.
- 18. Hearing protection and hazards.** Always wear hearing protection as noise generated from machine and workpiece can cause permanent hearing loss over time.
- 19. Call for help.** If at any time you experience difficulties, stop the machine and call your nearest branch service department for help.

PLANT SAFETY PROGRAM

NEW MACHINERY HAZARD IDENTIFICATION, ASSESSMENT & CONTROL

Swage & Jenny Machine

Developed in Co-operation Between A.W.I.S.A and Australia Chamber of Manufactures

This program is based upon the Safe Work Australia, Code of Practice - Managing Risks of Plant in the Workplace (WHSA 2011 No10)

Item No.	Hazard Identification	Hazard Assessment	Risk Control Strategies (Recommended for Purchase / Buyer / User)
A	ENTANGLEMENT	HIGH	Eliminate, avoid loose clothing / Long hair etc.
B	CRUSHING	LOW	Secure & support work material. Ensure machine is bolted down.
C	CUTTING, STABBING, PUNCTURING.	MEDIUM	Isolate power to machine prior to any checks or maintenance being carried out. Do not adjust or clean until the machine has fully stopped. Wear gloves to prevent cuts from material.
D	SHEARING	MEDIUM	Isolate power to machine when checks or maintenance is being carried out. Make sure all guards are secured shut when machine is on. Hands should be kept clear of moving parts such as rolls etc.
F	STRIKING	MEDIUM	Ensure area is kept clear of material being rolled.
H	ELECTRICAL	MEDIUM	All electrical enclosures should only be opened with a tool that is not to be kept with the machine. Machine should be installed & checked by a Licensed Electrician.
O	OTHER HAZARDS, NOISE.	LOW	Wear hearing protection as required.
Plant Safety Program to be read in conjunction with manufactures instructions			



www.machineryhouse.com.au



www.machineryhouse.co.nz

Authorised and signed by:

Safety officer:

Manager:

Revised Date: 12th March 2012