


Swivel Head Band Saws

EB-320DS - Dual Mitre

- 310 x 205mm (W x H) rectangular capacity
- 2-speed motor enabling blade speeds of 35 & 70M/min
- Swivel head dual mitre cut to 45° left, 60° right
- Quick action lock/release lever for swivel head & vice
- Control panel mounted in a convenient location
- Coolant system for cutting efficiency and blade life
- Adjustable hydraulic cylinder for auto feed
- Ball bearing & carbide blade guides
- Blade cleaning brush

EB-320DS
\$4,690 ex GST
\$5,159 inc GST (B067)

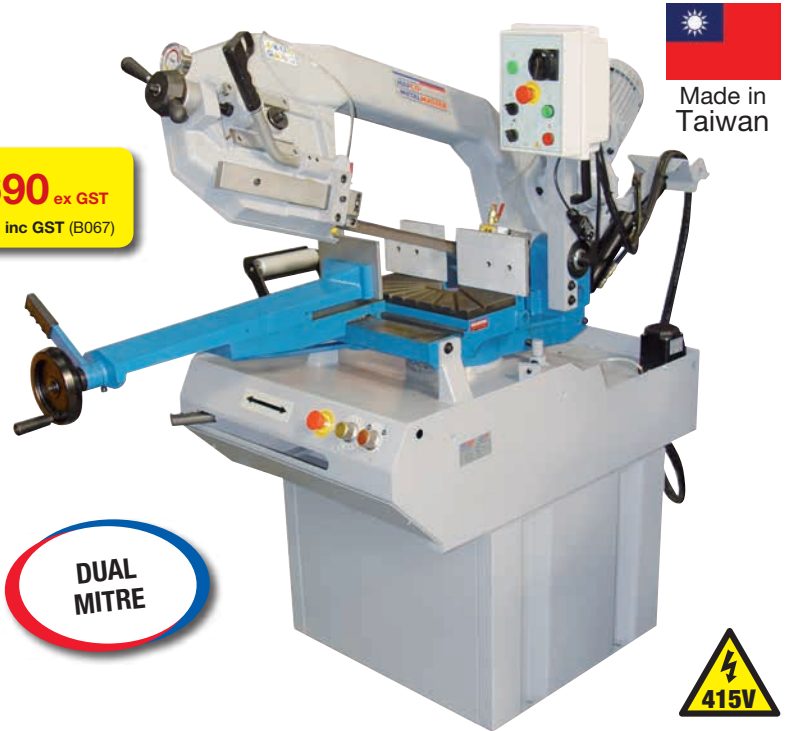

Blades for EB-320DS			Excision [®] <small>Melb Perth</small>	Starrett <small>Syd Bris</small>	
TYPE	TPI	Solid Section	CODE	ex GST	inc GST
Bi-Metal	4-6	51 - 80mm	B530	\$75	\$82.50
Bi-Metal	6-10	16 - 30mm	B531	\$75	\$82.50
Bi-Metal	10-14	Up to 10mm	B532	\$75	\$82.50



Variable Feed Control
EB-320DS



Dual Mitre Vice
EB-320DS



Ball Bearing & Carbide Guides
EB-320DS



Blade Tension Gauge
EB-320DS

Includes: EB-260V, EB-280DSV, EB-320DS

- Coolant System ✓ Hydraulic Feed ✓
- Length Stop ✓ 1 x Blade ✓

Optional Accessories:



MODEL		EB-260V	EB-280DSV	EB-320DS
ORDER CODE		B062V	B063V	B067
Cutting Head Beam	Auto/Man.	Manual	Manual	Manual
Operation Type	Swivel/Fixed	Swivel	Dual Swivel	Dual Swivel
Cutting Capacities:				
	90° mm	225	225	255
	45° mm	150	160	220
	60° mm	100	100	125
	90° mm	180	180	205
	45° mm	140	160	200
	60° mm	100	100	125
	(WxH) 90° mm	225 x 180	245 x 180	310 x 205
	(WxH) 45° mm	140 x 140	160 x 160	205 x 200
	(WxH) 60° mm	100 x 100	100 x 100	125 x 125
Cutting Beam Return	Type	Manual	Manual	Manual
Vice Clamping Fixture	Type	Manual	Manual	Manual
Coolant System	~/✓	✓	✓	✓
Table Working Height	mm	950	965	950
Blade Speeds	M/min	Variable (20-90)	Variable (20-90)	35, 70
Blade Size (LxWxT)	mm	2480x27x0.9	2480x27x0.9	2750x27x0.9
Motor Power	kW/hp	1.5 / 2	1.5 / 2	1.5 / 2
Voltage	V	240	240	415
Shipping Dim. (LxWxH)	cm	138x58x93	148x76x96	173x74x113
Weight	kg	200	315	371
PRICE	ex GST	\$2,590	\$3,950	\$4,690
PRICE	inc GST	\$2,849	\$4,345	\$5,159